


# Terminal Blocks



## A.2 Terminals W-Series Screw Connection

- A.2 Feed-Through Terminals
- A.3 Terminals with Spring Loaded Cable Clamps
- A.3 Twin Connection Terminals
- A.4 Earth Terminals
- A.5 Double Level Feed Through and Twin Connection Terminals
- A.5 Double Level Feed Through and Earth Terminals
- A.6 Feed Through and Earth Terminals
- A.7 Disconnect Terminals
- A.8 Fuse Terminals and Inserts
- A.9 Terminals with Diode
- A.10 1 and 2 Stud Terminals
- A.11 Initiator and Actuator Terminals
- A.12 Accessories




## A.17 Terminals Z-Series Tension Clamp Connection

- A.17 Feed-Through Terminals
- A.18 Feed-Through and Earth Terminals
- A.19 Multi-tier Terminals
- A.19 Disconnect Terminals
- A.20 Earth Terminals
- A.21 Fuse Terminals and Inserts
- A.22 Feed-Through Terminals, Roof-Style
- A.22 Disconnect Terminals, Roof-Style
- A.23 Earth Terminals, Roof-Style
- A.23 Fuse Terminals, Roof-Style
- A.24 Two-Tier Terminals, Roof-Style
- A.24 Terminals with Electronic Components, Roof-Style
- A.25 Accessories



## A.29 Terminals P-Series Push In and Distribution Terminals

- A.29 Feed-Through Terminals
- A.29 Earth Terminals
- A.30 Two-Tier Terminals
- A.30 Disconnect Terminals
- A.30 Holder for Cartridge
- A.30 Distribution Terminals
- A.32 Modular Fuse and Test Disconnect Terminals
- A.33 Marshalling and Distribution Terminals
- A.34 Accessories











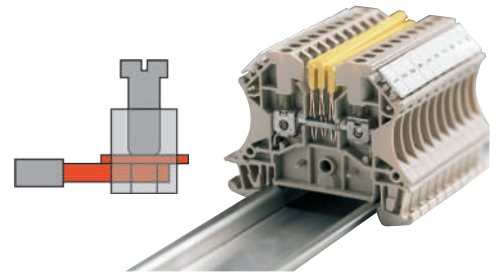


## A.36 Terminals SAK-Series Screw Connection

- A.36 Feed-Through Terminals
- A.37 Feed-Through Terminals with Two Tiers
- A.37 Earth Terminals
- A.38 Disconnect Terminals
- A.38 Fuse Terminals
- A.39 Fuse Terminals with Two Tiers
- A.39 Fuse Terminals with One Tier
- A.40 Fuse Terminals
- A.41 Initiator and Actuator Terminals
- A.41 Terminal Strips
- A.42 Accessories

**Feed-Through Terminals**







- From 0.13 to 240mm<sup>2</sup>
- Fits to all TS 35 x 7.5 or 15mm
- Flammability class V0 to UL 94
- Temperature resistant from -50 °C to +120 °C
- Contains no halogen or phosphorous
- Cross-connections, also pluggable





Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>WDU 2.5N</b> - Beige - Blue	<b>1023700000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	5.1	<b>1060000000</b>
	<b>1023780000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	5.1	<b>1060080000</b>
 <b>WDU 2.5</b> - Beige - Blue	<b>1020000000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1050000000</b>
	<b>1020080000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1050080000</b>
 <b>WDU 4</b> - Beige - Blue	<b>1020100000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.1	<b>1050000000</b>
	<b>1020180000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.1	<b>1050080000</b>
 <b>WDU 6</b> - Beige - Blue	<b>1020200000</b>	100	0.5 ... 10	0.5 ... 6.0	800 V	41 A	7.9	<b>1050000000</b>
	<b>1020280000</b>	100	0.5 ... 10	0.5 ... 6.0	800 V	41 A	7.9	<b>1050080000</b>
 <b>WDU 10</b> - Beige - Blue	<b>1020300000</b>	50	1.5 ... 16	1.5 ... 16	1000 V	57 A	9.9	<b>1050000000</b>
	<b>1020380000</b>	50	1.5 ... 16	1.5 ... 16	1000 V	57 A	9.9	<b>1050080000</b>
 <b>WDU 16</b> - Beige - Blue	<b>1020400000</b>	50	1.5 ... 25	1.5 ... 25	1000 V	76 A	12	<b>1050100000</b>
	<b>1020480000</b>	50	1.5 ... 25	1.5 ... 25	1000 V	76 A	12	<b>1050180000</b>
 <b>WDU 35</b> - Beige - Blue	<b>1020500000</b>	40	2.5 ... 50	2.5 ... 35	1000 V	125 A	16	<b>1050100000</b>
	<b>1020580000</b>	40	2.5 ... 50	2.5 ... 35	1000 V	125 A	16	<b>1050180000</b>
 <b>WDU 70/95</b> - Beige - Blue	<b>1024600000</b>	10	16 ... 120	16 ... 95	1000 V	232 A	27	-
	<b>1026800000</b>	10	16 ... 120	16 ... 95	1000 V	232 A	27	-
 <b>WDU 120/150</b> - Beige - Blue	<b>1024500000</b>	10	35 ... 150	35 ... 95	1000 V	309 A	32	-
	<b>1024580000</b>	10	35 ... 150	35 ... 95	1000 V	309 A	32	-
 <b>WDU 240</b> - Beige - Blue	<b>1802780000</b>	2	70 ... 240	70 ... 185	1000 V	415 A	36	-
	<b>1822210000</b>	2	70 ... 240	70 ... 185	1000 V	415 A	36	-

**Note** \* Qty. above is recommended pack sizes  
 \* For more information in regards to End Plates and Partitions for W Series Terminals please refer to page 12














## Terminals with Spring Loaded Cable Clamps

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>WDU 4SL</b> - Beige	<b>9537440000</b>	50	0.5 ... 6.0	0.5 ... 4.0	500 V	32 A	6.1	<b>1050000000</b>
 <b>WDU 6SL</b> - Beige	<b>9537460000</b>	50	0.5 ... 10	0.5 ... 6.0	500 V	41 A	7.9	<b>1050000000</b>
 <b>WDU 10SL</b> - Beige	<b>9537480000</b>	50	1.5 ... 16	1.5 ... 10	500 V	57 A	9.9	<b>1050000000</b>
 <b>WDU 4SL/EN</b> - Beige	<b>9537450000</b>	50	0.5 ... 6.0	0.5 ... 4.0	500 V	32 A	6.1	<b>1050080000</b>
 <b>WDU 6SL/EN</b> - Beige	<b>9537470000</b>	50	0.5 ... 10	0.5 ... 6.0	500 V	41 A	7.9	<b>1050080000</b>
 <b>WDU 10SL/EN</b> - Beige	<b>9537490000</b>	50	1.5 ... 16	1.5 ... 10	500 V	57 A	9.9	<b>1050080000</b>
<b>Note</b> * Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for W Series Terminals please refer to page 12								

## Twin Connection Terminals

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>WDU 1.5ZZ</b> - Beige - Blue	<b>1031400000</b>	100	0.5 ... 1.5	0.5 ... 1.5	800 V	17.5 A	5.1	<b>1050000000</b>
	<b>1031480000</b>	100	0.5 ... 1.5	0.5 ... 1.5	800 V	17.5 A	5.1	<b>1050080000</b>
 <b>WDU 2.5/1.5/ZR</b> - Beige - Blue	<b>1024700000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	17.5 A	5.1	<b>1050000000</b>
	<b>1024780000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	17.5 A	5.1	<b>1050080000</b>









## Earth Terminals

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 WPE 2.5N	<b>1016200000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	-	5.1	<b>1060000000</b>
 WPE 2.5	<b>1010000000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	-	5.1	<b>1050000000</b>
 WPE 4	<b>1010100000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	-	6.1	-
 WPE 4N	<b>1042700000</b>	100	0.5 ... 4.0	0.5 ... 4.0	500 V	-	6.1	<b>1060000000</b>
 WPE 6	<b>1010200000</b>	50	0.5 ... 10	0.5 ... 6.0	1000 V	-	7.9	-
 WPE 10	<b>1010300000</b>	50	1.5 ... 16	1.5 ... 16	800 V	-	9.9	-
 WPE 16	<b>1010400000</b>	50	1.5 ... 25	1.5 ... 16	1000 V	-	12	-
 WPE 35	<b>1010500000</b>	20	2.5 ... 50	2.5 ... 35	800 V	-	16	-
 WPE 50N	<b>1846040000</b>	10	10 ... 70	10 ... 50	1000 V	-	18.5	-
 WPE 70/95	<b>1037300000</b>	10	16 ... 120	16 ... 95	1000 V	-	27	-
 WPE 70N/35	<b>9512200000</b>	10	10 ... 95	10 ... 70	1000 V	-	20.5	-
 WPE 95N/120	<b>1846030000</b>	5	16 ... 120	16 ... 95	1000 V	-	27	-
 WPE 120/150	<b>1019700000</b>	10	35 ... 150	35 ... 95	1000 V	-	32	-



**Note** \* Qty. above is recommended pack sizes  
 \* For more information in regards to End Plates and Partitions for W Series Terminals please refer to page 12

## Double Level Feed Through and Twin Connection Terminals

- ZQV = pluggable cross connectors, an innovation of Weidmüller

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>WDU 1.5ZZ</b> - Beige - Blue	<b>1031400000</b>	100	0.5 ... 1.5	0.5 ... 1.5	800 V	17.5 A	5.1	<b>1050000000</b> <b>1050080000</b>
	<b>1031480000</b>	100	0.5 ... 1.5	0.5 ... 1.5	800 V	17.5 A	5.1	
 <b>WDU 2.5/1.5/ZR</b> - Beige - Blue	<b>1024700000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	17.5 A	5.1	<b>1050000000</b> <b>1050080000</b>
	<b>1024780000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	17.5 A	5.1	
 <b>WDK 2.5/ZQV</b> - Beige - Blue	<b>1041100000</b>	100	0.5 ... 4.0	0.5 ... 2.5	400 V	24 A	5.1	<b>1059100000</b> <b>1059180000</b>
	<b>1041180000</b>	100	0.5 ... 4.0	0.5 ... 2.5	400 V	24 A	5.1	
 <b>WDK 2.5</b> - Beige - Blue	<b>1021500000</b>	100	0.5 ... 4.0	0.5 ... 2.5	400 V	24 A	5.1	<b>1059100000</b> <b>1059180000</b>
	<b>1021580000</b>	100	0.5 ... 4.0	0.5 ... 2.5	400 V	24 A	5.1	
 <b>WDK 2.5N</b> - Beige - Blue	<b>1041600000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1084000000</b> <b>1084080000</b>
	<b>1041680000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	
 <b>WDK 2.5N V</b> - Beige	<b>1041610000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1084000000</b>
 <b>WDK 4N</b> - Beige - Blue	<b>1041900000</b>	100	0.5 ... 6	0.5 ... 4	800 V	32 A	6.1	<b>1084000000</b> <b>1084080000</b>
	<b>1041980000</b>	100	0.5 ... 6	0.5 ... 4	800 V	32 A	6.1	
 <b>WDK 4N V</b> - Beige	<b>1041910000</b>	100	0.5 ... 6	0.5 ... 4	800 V	32 A	6.1	<b>1084000000</b>

## Double Level Feed Through and Earth Terminals








Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>WDK 2.5N DU PE</b> - Beige	<b>1041650000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1084000000</b>
 <b>WDK 4N DU PE</b> - Beige	<b>1041950000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	32 A	6.1	<b>1084000000</b>

Feed Through and Earth Terminals

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <p><b>WPE 1.5/ZZ</b> - Beige - Blue</p>	<b>1016500000</b>	100	1.5 ... 2.5	0.5 ... 1.5	800 V	-	5.1	<b>1050000000</b>
								<b>1050080000</b>
 <p><b>WPE 2.5/1.51 ZR</b> - Beige - Blue</p>	<b>1016400000</b>	100	1.5 ... 4.0	0.5 ... 2.5	800 V	-	5.1	<b>1050000000</b>
								<b>1050080000</b>
 <p><b>WDK 2.5 PE</b> - Beige - Blue</p>	<b>1036300000</b>	100	0.5 ... 4.0	0.5 ... 2.5	400 V	-	5.1	<b>1059100000</b>
								<b>1059180000</b>
 <p><b>WDK 2.5N DU PE</b> - Beige - Blue</p>	<b>1041650000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1084000000</b>
								<b>1084080000</b>
 <p><b>WDK 2.5N PE</b> - Beige - Blue</p>	<b>1041620000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	-	5.1	<b>1084000000</b>
								<b>1084080000</b>
 <p><b>WDK 4N DU PE</b> - Beige - Blue</p>	<b>1041950000</b>	100	0.5 ... 4.0	0.5 ... 4.0	800 V	32 A	6.1	<b>1084000000</b>
								<b>1084080000</b>
 <p><b>WDK 4N PE</b> - Beige - Blue</p>	<b>1041920000</b>	100	0.5 ... 4.0	0.5 ... 4.0	800 V	-	6.1	<b>1084000000</b>
								<b>1084080000</b>

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for W Series Terminals please refer to page 12

## Disconnect Terminals

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 WTR 2.5 - Beige - Blue	1855610000	100	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	5.1	1050000000
	8731640000	100	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	5.1	
 WTR 2.5: With Test Socket Screw - Beige - Blue	1855620000	100	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	5.1	1050000000
	8731660000	100	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	5.1	
 WTR 4 - Beige - Blue	7910180000	50	0.5 ... 6.0	0.5 ... 4.0	400 V	32 A	6.1	1050000000
	7910190000	50	0.5 ... 6.0	0.5 ... 4.0	400 V	32 A	6.1	
 WTR 4: With Test Socket Screw - Beige - Blue	7910210000	50	0.5 ... 6.0	0.5 ... 4.0	400 V	32 A	6.1	1050000000
	7910220000	50	0.5 ... 6.0	0.5 ... 4.0	400 V	32 A	6.1	
 WDTR 2.5 - Beige - Blue	9528070000	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	6.2	-
	9528080000	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	6.2	
 WDTR 2.5/WE - Beige - Blue	9528090000	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	6.2	-
	9528100000	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	6.2	
 WTL 6/1/STB - Beige	1016900000	50	0.5 ... 10	0.5 ... 6.0	800 V	41 A	7.9	1068300000

Note \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for W Series Terminals please refer to page 12

## Accessories For WTR 2.5

For Terminals

Order No

## SIHA Fuse Holder (5 x 20 mm)

SIHA 3 Fuse  
400 V ac/dc without LED  
10-36 V ac/dc LED (red)  
140-250 V ac/dc LED (red)

SIHA 3/G20 400V  
SIHA 3/G20 10-36V  
SIHA 3/G20 140-250V

WTR 2.5, WTR 4



7921560000  
7921570000  
7921600000

## Diode plug (up to 250V) just for WTR 2.5

WSD 2.5/D+/- WTR 2.5  
WSD 2.5/D-/+ WTR 2.5  
WSD 2.5/EMPTY WTR 2.5

1878560000  
1878560000  
1833100000

## Fuse Terminals



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions **
<b>WSI 6</b> - Beige	<b>101100000</b>	50	0.5 ... 10	0.5 ... 6.0	500 V	6.3 A	7.9	<b>105000000</b>
<b>WSI 6 LD (with LED)</b> 10-36 V DC/AC	<b>1011300000</b>	50	0.5 ... 10	0.5 ... 6.0	-	6.3 A	7.9	<b>105000000</b>
30-70 V DC/AC	<b>1012200000</b>	50	0.5 ... 10	0.5 ... 6.0	-	6.3 A	7.9	<b>105000000</b>
60-150 V DC/AC	<b>1012300000</b>	50	0.5 ... 10	0.5 ... 6.0	-	6.3 A	7.9	<b>105000000</b>
110 V DC / 250 V AC	<b>1012400000</b>	50	0.5 ... 10	0.5 ... 6.0	-	6.3 A	7.9	<b>105000000</b>
<b>WTR 2.5 SI *</b> - Beige	<b>1763940000</b>	25	0.5 ... 4.0	0.5 ... 4.0	400 V	6.3 A	5.1	<b>105000000</b>
<b>WTR 4 SI *</b> - Beige	<b>7910240000</b>	25	0.5 ... 6.0	0.5 ... 4.0	400 V	6.3 A	6.1	<b>105000000</b>

## Fuse Inserts



G Fuse Inserts 5 x 20 without indicator acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)  
Breaking capacity 1500 A (at 250 V, 50Hz, cos = 0.7)

Type	Order No	Qty*	Rated Voltage	Rated Current	Size (mm)	For Terminals
(F) G 20/ 0.10 A/F	<b>0430300000</b>	10	250 V	0.10 A	5 x 20	<b>SAKS 1/G20, SAKS 7, ASK 1, WSI 6 KSK 1/35, KDKS 1/35</b>
(F) G 20/ 0.20 A/F	<b>0430400000</b>	10	250 V	0.20 A	5 x 20	
(F) G 20/ 0.25 A/F	<b>0430500000</b>	10	250 V	0.25 A	5 x 20	
(F) G 20/ 0.50 A/F	<b>0430600000</b>	10	250 V	0.50 A	5 x 20	
(F) G 20/ 0.63 A/F	<b>0439000000</b>	10	250 V	0.63 A	5 x 20	
(F) G 20/ 1.00 A/F	<b>0430700000</b>	10	250 V	1.00 A	5 x 20	
(F) G 20/ 1.60 A/F	<b>0430800000</b>	10	250 V	1.60 A	5 x 20	
(F) G 20/ 2.00 A/F	<b>0430900000</b>	10	250 V	2.00 A	5 x 20	
(F) G 20/ 2.50 A/F	<b>0431000000</b>	10	250 V	2.50 A	5 x 20	
(F) G 20/ 3.15 A/F	<b>0431100000</b>	10	250 V	3.15 A	5 x 20	
(F) G 20/ 4.00 A/F	<b>0431200000</b>	10	250 V	4.00 A	5 x 20	
(F) G 20/ 5.00 A/F	<b>0431300000</b>	10	250 V	5.00 A	5 x 20	
(F) G 20/ 6.30 A/F	<b>0431400000</b>	10	250 V	6.30 A	5 x 20	

## WSI Fuse Terminals




Version	Order No	Type	Qty	W x L x H mm	Flexible / Stranded wire with end ferrules
<b>WSI 25 10 x 38</b>					
- 1 Pole without LED	<b>1966020000</b>	WSI 25/1 10 x 38	12	36 x 28 x 81	1.5...25 / 1.5 ... 25 mm <sup>2</sup>
- 2 Pole without LED	<b>1966090000</b>	WSI 25/2 10 x 38	6	36 x 28 x 81	1.5...25 / 1.5 ... 25 mm <sup>2</sup>
- 3 Pole without LED	<b>1966080000</b>	WSI 25/3 10 x 38	4	36 x 28 x 81	1.5...25 / 1.5 ... 25 mm <sup>2</sup>
- 1 Pole with LED	<b>1966060000</b>	WSI 25/1 10 x 38/LED	12	36 x 28 x 81	1.5...25 / 1.5 ... 25 mm <sup>2</sup>
<b>Accessories</b>					
10 Amp HRC Fuse	<b>7940035094</b>	10 x 38mm 120kA			
16 Amp HRC Fuse	<b>7940035095</b>	10 x 38mm 120kA			
32 Amp HRC Fuse	<b>7940033862</b>	10 x 38mm 120kA			




## Terminals with Diode


- Diode Rating 1 Amp 1000V





Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions **
<b>WDK 2.5/D</b> - Reverse Voltage Protection - Beige	<b>8025610000</b>	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	5.1	<b>1059100000</b>
<b>WDK 2.5/D/1</b> - Circuit e.g. for contactor - Beige	<b>1023400000</b>	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	5.1	<b>1059100000</b>



## Terminals with Diode



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions **
<b>WDK 2.5/D/2</b> - Circuit e.g. for contactor - Beige	<b>1023300000</b>	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	5.1	<b>1059100000</b>
<b>WDK 2.5/D/3</b> - Lamp Test Circuit - Beige	<b>8014670000</b>	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	5.1	<b>1059100000</b>
<b>WDK 2.5/D/5</b> - Lamp Test Circuit - Beige	<b>1022600000</b>	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	5.1	<b>1059100000</b>
<b>WDK 2.5/D/6</b> - Lamp Test Circuit - Beige	<b>1023500000</b>	25	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	5.1	<b>1059100000</b>
<b>WDK 2.5E/o. Elektr</b> - For installation of electronic components - Beige	<b>1023200000</b>	100	0.5 ... 4.0	0.5 ... 2.5	400 V	10 A	5.1	<b>1059100000</b>
<b>WDK 2.5 LD - -</b> - DC voltage indicator - LED (red) 1R 24VDC - LED (green) 1R 24VDC - Beige	<b>1023600000</b> <b>8023610000</b>	25 25	0.5 ... 4.0 0.5 ... 4.0	0.5 ... 2.5 0.5 ... 2.5	24 V 24 V	10 A 10 A	5.1 5.1	<b>1059100000</b>
<b>WDK 2.5 LD - +</b> - DC voltage indicator - LED (red) 1R 24VDC - LED (green) 1R 24VDC - Beige	<b>8023630000</b> <b>8010040000</b>	25 25	0.5 ... 4.0 0.5 ... 4.0	0.5 ... 2.5 0.5 ... 2.5	24 V 24 V	10 A 10 A	5.1 5.1	<b>1059100000</b>



2-Stud Terminals

- WFF



Type	Order No	Qty*	Rated Voltage	Rated Current	Rated Cross Section m2	Cable Lugs	Width (mm)
<b>Series version without hood</b>							
WFF 35 M6 Screw Thread	1028300000	10	1000 V	125 A	35	2.5 ... 50	27
WFF 70 M8 Screw Thread	1028400000	10	1000 V	192 A	70	2.5 ... 95	32
WFF 120 M10 Screw Thread	1028500000	5	1000 V	269 A	120	6.0 ... 150	42
WFF 185 M12 Screw Thread	1028600000	4	1000 V	353 A	185	10 ... 240	55
WFF 300 M16 Screw Thread	1028700000	4	1000 V	520 A	300	25 ... 240	55
<b>Series version with hood</b>							
WFF 35/AH M6 Screw Thread	1029300000	10	1000	125	35	2.5 ... 50	27
WFF 70/AH M8 Screw Thread	1029400000	10	1000	192	70	2.5 ... 95	32
WFF 120/AH M10 Screw Thread	1029500000	5	1000	269	120	6 ... 150	42
WFF 185/AH M12 Screw Thread	1029600000	4	1000	353	185	10 ... 240	55
WFF 300/AH M16 Screw Thread	1029700000	4	1000	520	300	25 ... 240	55
<b>Note</b> * Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for W Series Terminals please refer to page 12							

- WF 2BZ



Type	Order No	Qty*	Rated Voltage	Rated Current A	Rated Cross Section m2	Cable Lugs	Width (mm)
WF 6/2BZ M6 Screw Thread	1789770000	25	1000 V	125 A	35	2.5 ... 35	19.6
WF 8/2BZ M8 Screw Thread	1789780000	25	1000 V	150 A	50	2.5 ... 50	24.6
WF 10/2BZ M10 Screw Thread	1789790000	25	1000 V	269 A	120	6.0 ... 120	35.6
ST 5 M5 Screw Thread	0448360000	20	800 V	76 A	16	2.5 ... 16	16.4

1-Stud Terminals

- WF - Series



Type	Order No	Qty*	Rated Voltage	Rated Current	Rated Cross Section mm2	Cable Lugs	Width (mm)
WF 5 M5 Screw Thread	1790130000	25	1000 V	76 A	16	0.11 ... 16	13
WF 6 M6 Screw Thread	1780850000	25	1000 V	125 A	35	2.5 ... 35	19.6
WF 8 M8 Screw Thread	1780860000	25	1000 V	150 A	50	2.5 ... 50	24.6
WF 10 M10 Screw Thread	1780870000	20	1000 V	269 A	120	6.0 ... 120	35.6
WF 12 M12 Screw Thread	1780880000	20	1000 V	269 A	120	6.0 ... 120	35.6
<b>Note</b> * Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for W Series Terminals please refer to page 12							

## Initiator and Actuator Terminals


- Fits with TS 35 x 7.5 din rail

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions
	<b>1784180000</b>	50	0.5 ... 4.0	0.5 ... 2.5	250 V	24 A	6	<b>1784210000</b>
	<b>1783820000</b>	100	0.5 ... 4.0	0.5 ... 2.5	250 V	24 A	6	<b>1783550000</b>
	<b>1615270000</b>	50	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	6	<b>7917000000</b>
	<b>1783790000</b>	50	1.5 ... 4	0.5 ... 2.5	250 V	17.5 A	6.1	<b>1783800000</b>
	<b>1783980000</b>	100	1.5 ... 4	0.5 ... 2.5	30 V	24 A	6.1	<b>1783550000</b>
	<b>1783970000</b>	100	1.5 ... 4	0.5 ... 2.5	30 V	24 A	6.1	<b>1783550000</b>
								
	<b>1783950000</b>	100	1.5 ... 4	0.5 ... 2.5	30 V	24 A	6.1	<b>1783550000</b>
	<b>1783940000</b>	100	1.5 ... 4	0.5 ... 2.5	30 V	24 A	6.1	<b>1783550000</b>
								
	<b>1633250000</b>	50	0.5 ... 2.5	0.5 ... 2.5	250 V	17.5 A	6.2	<b>1784150000</b>

**Note** \* For more information in regards to End Plates and Partitions for W Series Terminals please refer to page 12  
\* For variations of LED versions please see our complete terminals catalogue or contact the Weidmüller Power Products distributor in your region

## End Plates - Partitions

- WAP = End Plate
- WTW = Partition




Type	Colour	Qty*	Order No	For Terminals:
<b>1.5 mm thick</b> WAP WDU 1.5/R3.5	Dark Beige	20	<b>1754190000</b>	WDU 1.5/R3.5    WPE 1.5/R3.5
<b>1.5 mm thick</b> WAP 2.5-10	Dark Beige	50	<b>1050000000</b>	WDU 2.5-10    WSI6
WAP 2.5-10 BL	Blue	50	<b>1050080000</b>	WDU 4-10SL WDU 4-10SL/EN
				WDU 1.5ZZ    WTR 2.5/SL    WPE 1.5ZZ WDU 2.5/1.5/ZR    WTR 4/SL    WPE 2.5/1.5/ZR
<b>1.5 mm thick</b> WAP 16-35    WTW 2.5-10	Dark Beige	20	<b>1050100000</b>	WDU 16    WDU 4-10SL
WAP 16-35    WTW 2.5-10 BL	Blue	20	<b>1050180000</b>	WDU 35    WDU 4-10 SL/EN
<b>1.5 mm thick</b> WAP WDK 1.5/R3.5	Dark Beige	20	<b>1754200000</b>	WDK 1.5/R3.5
<b>1.5 mm thick</b> WAP WDU 2.5N/4N	Dark Beige	50	<b>1060000000</b>	WDU 2.5N
WAP WDU 2.5N/4N BL	Blue	50	<b>1060080000</b>	WDU 4N
<b>1.5 mm thick</b> WAP WDK 2.5/4N	Dark Beige	20	<b>1084000000</b>	WDK 2.5N
WAP WDK 2.5/4N BL	Blue	20	<b>1084080000</b>	WDK 2.5N V WDK 2.5N DU-PE WDK 2.5N PE WDK 4N WDK 4N V WDK 4N DU-PE WDK 4N PE
<b>1.5 mm thick</b> WAP WDK 2.5	Dark Beige	20	<b>1059100000</b>	WDK 2.5
WAP WDK 2.5 BL	Blue	20	<b>1059180000</b>	WDK 2.5 ZQV    WDK 2.5 PE    WDK 2.5 D... WDK 2.5 ZQV    WDK 2.5 FF    WDK 2.5 LD...
<b>1.5 mm thick</b> WAP WTR 2.5/ZZ	Dark Beige	20	<b>1074600000</b>	WTR 2.5/ZZ
WAP WTR 2.5/ZZ BL	Blue	20	<b>1074680000</b>	
<b>1.5 mm thick</b> WAP WDL 2.5/S	Dark Beige	20	<b>1067700000</b>	WDL 2.5/S...
<b>1.5 mm thick</b> WAP WDL 2.5	Dark Beige	20	<b>1067800000</b>	WDL 2.5...
<b>1.5 mm thick</b> AP DLI 2.5 DB	Dark Beige	20	<b>1783550000</b>	DLI 2.5 DB...    DLA 2.5 DB...
<b>1.5 mm thick</b> AP DLD 2.5 DB	Dark Beige	20	<b>1784210000</b>	DLD 2.5 DB
<b>1.5 mm thick</b> WAP WTL 6.1	Dark Beige	20	<b>1068300000</b>	WTD 6.1...    WTL 6.1...
<b>1.5 mm thick</b> ZAP/TW 1	Dark Beige	50	<b>1608740000</b>	WTL 4...
ZAP/TW 1 BL	Blue	50	<b>1608750000</b>	
<b>3 mm</b> WTW EN	Dark beige	20	<b>1058800000</b>	WDK 2.5N    WDU 16N    SAKS 2/35 WDK 2.5    WDU 35N    SAKS 4/35 WDK 4N    WTL 6    SAKS 5/35

Note \* Qty. above is recommended pack sizes

## Pluggable Cross-Connections

## • Type ZQV



Poles	Type	Qty*	Order No: Yellow	Order No: Red	Order No: Blue	Order No: Black	For Terminals:
2	ZQV 2.5N/2	60	1693800000	1717900000	1717990000	1718080000	
3	ZQV 2.5N/3	60	1693810000	1717910000	1718000000	1718090000	WDU 2.5/1.5 ZR;
4	ZQV 2.5N/4	60	1693820000	1717920000	1718010000	1718100000	WDU 2.5; WTR 2.5
5	ZQV 2.5N/5	20	1693830000	1717930000	1718020000	1718110000	WDK 2.5/ ZQV;
6	ZQV 2.5N/6	20	1693840000	1717940000	1718030000	1718120000	WDU 1.5 BLZ 5.08/ZQV
7	ZQV 2.5N/7	20	1693850000	1717950000	1718040000	1718130000	WDU 2.5N; WDK 2.5N
8	ZQV 2.5N/8	20	1693860000	1717960000	1718050000	1718140000	WDK 2.5N V
9	ZQV 2.5N/9	20	1693870000	1717970000	1718060000	1718150000	WDK 2.5N DU-PE
10	ZQV 2.5N/10	20	1693880000	1717980000	1718070000	1718160000	WTR 2.5; WTR 2.5 ZZ
50	ZQV 2.5N/50	10	1693890000	1718170000	1718180000	1718190000	
2	ZQV 4N/2	60	1758250000	1793950000	1793960000	1793970000	
3	ZQV 4N/3	60	1762630000	1793980000	1793990000	1794000000	WDU 4; WTR 4
4	ZQV 4N/4	60	1762620000	1794010000	1794020000	1794030000	WTR 4 SI; WTR 4 SL
10	ZQV 4N/10	20	1758260000	1794040000	1794050000	1794060000	WDU 4N; WDK 4N; WDK 4N V; WDK 4N DU-PE
41	ZQV 4N/41	10	1758270000	1794070000	1794080000	1794090000	
<b>Note</b> * Qty. above is recommended pack sizes * Yellow standard stock colour							

## Testing

## • Socket STB



## • Plug PS



## • WTA



For Terminal:	Socket STB: Ø 2.3mm Order No:	Qty*	Socket STB: Ø 4.0mm Order No:	Qty*	Plug PS: PS 2.3 - 2.3mm Order No:	Qty*	Plug PS: PS 4 - Ø 4.0mm Order No:	Qty*
<b>Feed Through Terminals</b>								
WDU 2.5N	0215700000	50			0180400000	20		
WDU 2.5	0215700000	50			0180400000	20		
WDU 4	0280600000	50			0180400000	20		
WDU 6	0280600000	50	0169900000	50	0180400000	20	0299600000	20
WDU 10	0280600000	50	0169900000	50	0180400000	20	0299600000	20
WDU 16N		50	0140200000	50		20	0299600000	20
WDU 35N			0140200000	50			0299600000	20
WDU 70N							0299600000	20
WDU 1.5/ZZ	0215700000	50			0180400000	20		
WDU 2.5/1.5/ZR	0215700000	50			0180400000	20		
<b>Disconnect Terminals:</b> WTR 2.5 WTR 4					0180400000 0180400000			
<b>Fuse Terminals:</b> WTR 4 SI					0180400000	20		
<b>Feed Through Terminals</b>	<b>Type</b>	<b>Order No.</b>	<b>Qty*</b>	<b>Solid Stranded mm<sup>2</sup></b>	<b>Flexible with Ferrule mm<sup>2</sup></b>	<b>Rated Voltage</b>	<b>Rated Current</b>	<b>Width (mm)</b>
WDU 2.5 to WDU 10	WTA 5/1	1051260000	25	0.5...1	1...1 / 0.5...1	250V	6:00AM	5

DIN Rail



Type	Material	Thickness	Length	Qty*	Order No
<b>TS 15 x 5</b> Slotted	Steel, White Passivated	1 mm	2 m	1	<b>0117500000</b>
<b>TS 32 x 15</b>	Steel, White Passivated	1.5 mm	2 m	1	<b>0122800000</b>
<b>TS 32 x 15</b> with Slotted Hole	Steel, White Passivated	1.5 mm	2 m	1	<b>0676100000</b>
<b>TS 35 x 7.5</b>	Steel, White Passivated	1 mm	2 m	1	<b>0383400000</b>
<b>TS 35 x 15 x 1.5</b>	Steel, White Passivated	1.5 mm	2 m	1	<b>0236400000</b>
<b>TS 35 x 7.5</b> with Slotted Hole M6x19mm	Steel, White Passivated	1 mm	2 m	1	<b>0676200000</b>
<b>TS 35 x 15</b> with Slotted Hole M5x25mm	Steel, White Passivated	1 mm	2 m	1	<b>0236500000</b>

**Note** \* Qty. above is recommended pack sizes

End Brackets

• Spring Clamp



Type	Order No	Qty*
ZEW 35/6 (TS35)	<b>9540000000</b>	20
ZEW 35/2 (TS35)	<b>8630740000</b>	20
ZEW 15 (TS15)	<b>7920340000</b>	20

**Note** \* Qty. above is recommended pack sizes

• Screw Clamp













Type	Order No	Qty*
WEW 35/1 (TS35)	<b>1059000000</b>	50
WEW 35/2 (TS35)	<b>1061200000</b>	50
EW 15 (TS15)	<b>0382860000</b>	50
EW 35	<b>0383560000</b>	50

**Note** \* Qty. above is recommended pack sizes

## Screw Cross-Connections


- Type WQV
- Colour: Yellow

WQV	No. of Poles	Type	Qty*	Order No	For Terminals:
	2	WQV 2.5/2	50	1053660000	WDU 1.5 ZZ, WDK 2.5 WDU 1.5 BLZ, WDK 2.5V WDU 2.5/1.5 ZR, WDK 2.5 DU-PE WDK 2.5 DU-PE, WDU 2.5, WDU 2.5 N WDK 2.5F, WDU 2.5F
	3	WQV 2.5/3	50	1053760000	
	4	WQV 2.5/4	50	1053860000	
	5	WQV 2.5/5	10	1053960000	
	6	WQV 2.5/6	10	1054060000	
	7	WQV 2.5/7	10	1054160000	
	8	WQV 2.5/8	10	1054260000	
	9	WQV 2.5/9	10	1054360000	
	10	WQV 2.5/10	20	1054460000	
	15	WQV 2.5/15	10	1059660000	
	32	WQV 2.5/32	10	1577600000	
		2	WQV 4/2	50	
3		WQV 4/3	50	1054560000	
4		WQV 4/4	50	1054660000	
5		WQV 4/5	10	1057860000	
6		WQV 4/6	10	1057160000	
7		WQV 4/7	10	1057260000	
8		WQV 4/8	10	1057960000	
9		WQV 4/9	10	1058060000	
	2	WQV 6/2	50	1052360000	WDU 6, WDU 6 SL
	3	WQV 6/3	50	1054760000	
	4	WQV 6/4	50	1054860000	
	5	WQV 6/5	50	1062660000	
	6	WQV 6/6	50	1062670000	
	7	WQV 6/7	50	1062680000	
	2	WQV 10/2	50	1052560000	WDU 10, WDU 10 SL, WDU 10 ZR
	3	WQV 10/3	50	1054960000	
	4	WQV 10/4	50	1055060000	
	10	WQV 10/10	20	1052460000	
	2	WQV 16/2	50	1053260000	WDU 16
	3	WQV 16/3	50	1055160000	
	4	WQV 16/4	50	1055260000	
	10	WQV 16/10	10	1053360000	
	2	WQV 16N/2	50	1636560000	WDU 16N
	3	WQV 16N/3	50	1636570000	
	4	WQV 16N/4	50	1636580000	
	2	WQV 35/2	50	1053060000	WDU 35
	3	WQV 35/3	50	1055360000	
	4	WQV 35/4	50	1055460000	
	2	WQV 35N/2	50	1079200000	WDU 35N
	3	WQV 35N/3	50	1079300000	
	4	WQV 35N/4	50	1079400000	
	2	WQV 50N/2	10	1834060000	WDU 50N
	3	WQV 50N/3	10	1834070000	
	4	WQV 50N/4	10	1834080000	
	2	WQV 70/2	5	1063500000	WDU 70/95
	3	WQV 70/3	5	1063600000	

Note \* Qty. above is recommended pack sizes

**Screw Cross Connection**

- Type WQV



WQV	No. of Poles	Type	Qty*	Order No	For Terminals:
WQV 70N	2	WQV 70N/2	5	9512240000	WDU 70N
	3	WQV 70N/3	5	9512250000	
	4	WQV 70N/4	5	9531290000	
WQV 95N/120N	2	WQV 95N/120N/2	5	1826890000	WDU 95N/120N
	3	WQV 95N/120N/3	5	1826900000	
WQV 120	2	WQV 120/2	5	1063300000	WDU 120/150

**Note** \* Qty. above is recommended pack sizes

**Cross Connection for 2-Stud Terminals**




For Terminal:	Type:	WQL 2 Order No:	Qty*	Type	WQL 3 Order No:	Qty*
WFF 35	WQL 2/35	1064900000	5	WQL 3/35	1065400000	5
WFF 70	WQL 2/70	1065000000	5	WQL 3/70	1065500000	5
WFF 120	WQL 2/120	1065100000	5	WQL 3/120	1065600000	5
WFF 185	WQL 2/185	1065200000	5	WQL 3/185	1065700000	5
WFF 300	WQL 2/300	1065300000	5	WQL 3/300	1065800000	5

**Cross Connection for Disconnect and Fuse Terminals**



For Terminal:	QL							
	2 Pole Order No:	Qty*	3 Pole Order No:	Qty*	4 Pole Order No:	Qty*	10 Pole Order No:	Qty*
<b>Disconnect Terminals</b>								
WTR 2.5 (ZQV)	1693800000	60	1693810000	60	1693820000	60	16938800000	20
<b>Fuse Terminals</b>								
WSI 6 Use with Screw	0194300000 1052100000	50 100	0194400000	50	0194500000	50	0338300000	20

**Cross Connection for Initiator and Actuator Terminals**



- Type Q

- Type VQB


For Terminals: DLI 2.5, DLI LD PNP, DLI LD NPN, DLD 2.5, DLA 2.5, DLA/D, DLA 2.5/D, DLA 2.5/PE								
No. of Pole:	Type Q Type:	Qty*	Order No:	Colour	Type VQB Type:	Qty*	Order No:	
2 Pole	Q2	50	1312500000	Blue	VQB 1.5/50BL	5	1633280000	
3 Pole	Q3	50	1312600000	Red	VQB 1.5/50RT	5	1633290000	
4 Pole	Q4	50	1312700000	Black	VQB 1.5/50SW	5	1635120000	
10 Pole	Q10	20	1313100000					

**Note** \* Qty. above is recommended pack sizes



**Feed-Through Terminals**

- From 0.13 to 35 mm<sup>2</sup>
- Flexible conductors with or without wire end ferrule
- Solid or standard conductors with or without wire end ferrule
- Fits with all TS 35 x 7.5 or x 15mm
- Combustibility class V0 to UL
- Temperature resistant from - 50° to + 120° C
- Contains no halogen or phosphorous

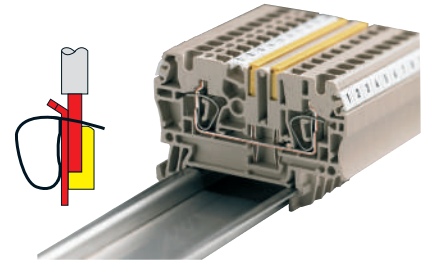

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>ZDU 1.5</b> - Beige - Blue	<b>1775480000</b>	100	0.5 ... 1.5	0.5 ... 1.5	500 V	17.5 A	3.5	<b>1776030000</b>
	<b>1775490000</b>	100	0.5 ... 1.5	0.5 ... 1.5	500 V	17.5 A	3.5	<b>1776040000</b>
 <b>ZDU 1.5/3AN</b> - Beige - Blue	<b>1775530000</b>	100	0.5 ... 1.5	0.5 ... 1.5	500 V	17.5 A	3.5	<b>1776060000</b>
	<b>1775540000</b>	100	0.5 ... 1.5	0.5 ... 1.5	500 V	17.5 A	3.5	<b>1776070000</b>
 <b>ZDU 1.5/4AN</b> - Beige - Blue	<b>1775580000</b>	100	0.5 ... 1.5	0.5 ... 1.5	500 V	17.5 A	3.5	<b>1776090000</b>
	<b>1775600000</b>	100	0.5 ... 1.5	0.5 ... 1.5	500 V	17.5 A	3.5	<b>1776100000</b>
 <b>ZDU 2.5</b> - Beige - Blue	<b>1608510000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1608740000</b>
	<b>1608520000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1608750000</b>
 <b>ZDU 2.5/3AN</b> - Beige - Blue	<b>1608540000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1608770000</b>
	<b>1608550000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1608780000</b>
 <b>ZDU 2.5/4AN</b> - Beige - Blue	<b>1608570000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1608800000</b>
	<b>1608580000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1608810000</b>
 <b>ZDU 4</b> - Beige - Blue	<b>1632050000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6	<b>1632090000</b>
	<b>1632060000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6	<b>1632100000</b>
 <b>ZDU 4/3AN</b> - Beige - Blue	<b>7904180000</b>	50	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6	<b>7904100000</b>
	<b>7904190000</b>	50	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6	<b>7904110000</b>
 <b>ZDU 4/4AN</b> - Beige - Blue	<b>7904290000</b>	50	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6	<b>7904210000</b>
	<b>7904300000</b>	50	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6	<b>7904220000</b>
 <b>ZDU 6</b> - Beige - Blue	<b>1608620000</b>	50	0.5 ... 10.0	0.5 ... 6.0	800 V	41 A	8	<b>1608830000</b>
	<b>1608630000</b>	50	0.5 ... 10.0	0.5 ... 6.0	800 V	41 A	8	<b>1608840000</b>

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25

Feed Through Terminals


Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
<b>ZDU 6/3AN</b> - Beige - Blue	7907410000	50	0.5 ... 10	0.5 ... 6	800 V	41 A	8	7907370000 7907380000
	7907420000	50	0.5 ... 10	0.5 ... 6	800 V	41 A	8	
<b>ZDU 10</b> - Beige - Blue	1746750000	25	1.5 ... 16	1.5 ... 10	1000 V	57 A	10	1748660000 1764110000
	1746760000	25	1.5 ... 16	1.5 ... 10	1000 V	57 A	10	
<b>ZDU 10/3AN</b> - Beige - Blue	1767690000	20	1.5 ... 16	1.5 ... 10	800 V	57 A	10	1749580000 1768520000
	1767700000	20	1.5 ... 16	1.5 ... 10	800 V	57 A	10	
<b>ZDU 16</b> - Beige - Blue	1745230000	25	1.5 ... 16	1.5 ... 16	1000 V	76 A	12	1745150000 1764100000
	1745240000	25	1.5 ... 16	1.5 ... 16	1000 V	76 A	12	
<b>ZDU 16/3AN</b> - Beige - Blue	1768320000	20	1.5 ... 16	1.5 ... 16	800 V	76 A	12	1749580000 1768520000
	1768330000	20	1.5 ... 16	1.5 ... 16	800 V	76 A	12	
<b>ZDU 35</b> - Beige - Blue	1739620000	10	2.5 ... 35	2.5 ... 35	800 V	125 A	16	- -
	1739630000	10	2.5 ... 35	2.5 ... 35	800 V	125 A	16	
<b>ZEI 16 (Power Distribution)</b> - Beige - Blue	1745350000	20	1.5 ... 16	1.5 ... 16	500 V	76 A	15	- -
	1766240000	20	1.5 ... 16	1.5 ... 16	500 V	76 A	15	

Feed Through and Earth Terminals

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
<b>ZDK 2.5/1.5</b> - Beige - Blue	1674300000	50	0.5 ... 2.5	0.5 ... 2.5	500 V	20 A	5.1	1674730000 1748800000
	1678630000	50	0.5 ... 2.5	0.5 ... 2.5	500 V	20 A	5.1	
<b>ZDK 2.5/1.5 V</b> - Beige - Blue	1689990000	50	0.5 ... 2.5	0.5 ... 2.5	500 V	20 A	5.1	1674730000 1748800000
	1745880000	50	0.5 ... 2.5	0.5 ... 2.5	500 V	20 A	5.1	
<b>ZDK 2.5/1.5 DU PE</b> - Beige	1689970000	50	0.5 ... 2.5	0.5 ... 2.5	-	20 A	5.1	1674730000
<b>ZDK 2.5/1.5 PE</b> - Green	1690000000	50	0.5 ... 2.5	0.5 ... 2.5	500 V	-	5.1	1674730000

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25


## Multi-tier Terminals



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
<b>ZDL 2.5-2 N</b> - Beige - Blue	<b>1782300000</b>	50	0.5 ... 2.5	0.5 ... 2.5	500 V	20 A	5.1	<b>1782340000</b> <b>1782350000</b>
	<b>1782310000</b>	50	0.5 ... 2.5	0.5 ... 2.5	500 V	20 A	5.1	
<b>ZDL 2.5-2 VN</b> - Beige - Blue	<b>1782320000</b>	25	0.5 ... 2.5	0.5 ... 2.5	400 V	20 A	5.1	<b>1782340000</b> <b>1782350000</b>
	<b>1782330000</b>	25	0.5 ... 2.5	0.5 ... 2.5	400 V	20 A	5.1	
<b>ZMAK 2.5</b> - Beige	<b>1768000000</b>	25	0.5 ... 4.0	0.5 ... 2.5	400 V	24 A	5.1	<b>1768010000</b>

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25

## Disconnect Terminals



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
<b>ZTR 2.5</b> - Beige - Blue Without Disconnecter	<b>1831280000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	20 A	5.1	<b>1608740000</b>
	<b>8731710000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	20 A	5.1	
	<b>1831130000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	20 A	5.1	
<b>ZTR 2.5/3AN</b> - Beige - Blue Without Disconnecter	<b>8731720000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	20 A	5.1	<b>1608800000</b>
	<b>8731730000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	20 A	5.1	
	<b>8728450000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	20 A	5.1	
<b>ZTR 2.5/4AN</b> - Beige - Blue Without Disconnecter	<b>7920900000</b>	100	0.5 ... 2.5	0.5 ... 1.5	400 V	16 A	5.1	<b>1608800000</b>
	<b>7920930000</b>	100	0.5 ... 2.5	0.5 ... 1.5	400 V	16 A	5.1	
	<b>7920950000</b>	100	0.5 ... 2.5	0.5 ... 1.5	400 V	16 A	5.1	
<b>ZDTR 2.5</b> - Beige - Blue	<b>1745400000</b>	20	0.5 ... 4.0	0.5 ... 2.5	400 V	16 A	5.1	<b>1745420000</b>
	<b>1798330000</b>	20	0.5 ... 4.0	0.5 ... 2.5	400 V	16 A	5.1	

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25






Earth Terminals



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions (Beige)*
ZPE 1.5 - Yellow/green	1775510000	100	0.5 ... 1.5	0.5 ... 1.5	500	-	3.5	1776030000
ZPE 1.5/3AN - Yellow/green	1775560000	100	0.5 ... 1.5	0.5 ... 1.5	500	-	3.5	1776060000
ZPE 1.5/4AN - Yellow/green	1775620000	100	0.5 ... 1.5	0.5 ... 1.5	500	-	3.5	1776090000
ZPE 2.5 - Yellow/green	1608640000	100	0.5 ... 4.0	0.5 ... 2.5	800	-	5.1	1608740000
ZPE 2.5/3AN - Yellow/green	1608650000	100	0.5 ... 4.0	0.5 ... 2.5	800	-	5.1	1608770000
ZPE 2.5/4AN - Yellow/green	1608660000	100	0.5 ... 4.0	0.5 ... 2.5	800	-	5.1	1608800000
ZPE 4 - Yellow/green	1632080000	100	0.5 ... 6.0	0.5 ... 4.0	800	-	6	1632090000
ZPE 4/3AN - Yellow/green	7904170000	50	0.5 ... 6.0	0.5 ... 4.0	800	-	6	7904100000
ZPE 4/4AN - Yellow/green	7904280000	50	0.5 ... 6.0	0.5 ... 4.0	800	-	6	7904210000
ZPE 6 - Yellow/green	1608670000	50	0.5 ... 10	0.5 ... 6.0	800	-	8	1608830000
ZPE 6/3AN - Yellow/green	7907400000	50	0.5 ... 10	0.5 ... 6.0	800	-	8	7907370000
ZPE 10 - Yellow/green	1746770000	25	1.5 ... 16	1.5 ... 10	800	-	10	1748660000
ZPE 10/3AN - Yellow/green	1767670000	20	1.5 ... 16	1.5 ... 10	800	-	10	1749580000
ZPE 16 - Yellow/green	1745250000	25	1.5 ... 16	1.5 ... 16	800	-	12	1745150000
ZPE 16/3AN - Yellow/green	1768310000	20	1.5 ... 16	1.5 ... 16	800	-	12	1749580000
ZPE 35 - Yellow/green	1739650000	10	2.5 ... 35	2.5 ... 35	800	-	16	-

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25

## Fuse Terminals









Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>ZSI 2.5/5x20</b> 400 V AC/DC 10-36 V AC/DC with LED 30-70 V AC/DC with LED 60-150 V AC/DC with LED 140-250 V AC/DC with LED	<b>1616400000</b>	50	0.5 ... 4.0	0.5 ... 2.5	500 V	6.3 A	7.9	<b>1608800000</b>
	<b>1616440000</b>	50	0.5 ... 4.0	0.5 ... 2.5	500 V	6.3 A	7.9	<b>1608800000</b>
	<b>1616430000</b>	50	0.5 ... 4.0	0.5 ... 2.5	500 V	6.3 A	7.9	<b>1608800000</b>
	<b>1616420000</b>	50	0.5 ... 4.0	0.5 ... 2.5	500 V	6.3 A	7.9	<b>1608800000</b>
	<b>1616410000</b>	50	0.5 ... 4.0	0.5 ... 2.5	500 V	6.3 A	7.9	<b>1608800000</b>
 <b>ZSI 2.5/5x25</b> 400 V AC/DC	<b>1730900000</b>	50	0.5 ... 4.0	0.5 ... 2.5	500 V	6.3 A	7.9	<b>1608800000</b>
 <b>ZSI 2.5/2</b> 400 V AC/DC 10-36 V AC/DC with LED 30-70 V AC/DC with LED 60-150 V AC/DC with LED 140-250 V AC/DC with LED	<b>1616460000</b>	10	0.5 ... 4.0	0.5 ... 2.5	500 V	12 A	7.9	-
	<b>1616470000</b>	10	0.5 ... 4.0	0.5 ... 2.5	500 V	12 A	7.9	-
	<b>1616480000</b>	10	0.5 ... 4.0	0.5 ... 2.5	500 V	12 A	7.9	-
	<b>1616490000</b>	10	0.5 ... 4.0	0.5 ... 2.5	500 V	12 A	7.9	-
	<b>1616500000</b>	10	0.5 ... 4.0	0.5 ... 2.5	500 V	12 A	7.9	-
 <b>ZTR 2.5/2*</b> 400 V AC/DC	<b>1831130000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	20 A	5.1	<b>1608740000</b>
 <b>ZTR 2.5/4 AN*</b> 400 V AC/DC	<b>7920950000</b>	100	0.5 ... 2.5	0.5 ... 1.5	400 V	16 A	5.1	<b>1608800000</b>

**Note** \* With fuse SIHA

## Fuse Inserts


Type	Order No	Qty*	Rated Voltage	Rated Current	Size (mm)	For Terminals
<b>G Fuse Inserts 5 x 20 without indicator acc. to IEC 60127-2 (VDE 0820 T.2 BI 1)</b>						
<b>Breaking capacity 1500 A (at 250 V, 50Hz, cos = 0.7)</b>						
(F) G 20/ 0.10 A/F	<b>0430300000</b>	10	250 V	0.10 A	5 x 20	SAKS 1/G20, SAKS 7, ASK 1, WSI 6
(F) G 20/ 0.20 A/F	<b>0430400000</b>	10	250 V	0.20 A	5 x 20	KSK 1/35,
(F) G 20/ 0.25 A/F	<b>0430500000</b>	10	250 V	0.25 A	5 x 20	KDKS 1/35
(F) G 20/ 0.50 A/F	<b>0430600000</b>	10	250 V	0.50 A	5 x 20	
(F) G 20/ 0.63 A/F	<b>0439000000</b>	10	250 V	0.63 A	5 x 20	
(F) G 20/ 1.00 A/F	<b>0430700000</b>	10	250 V	1.00 A	5 x 20	
(F) G 20/ 1.60 A/F	<b>0430800000</b>	10	250 V	1.60 A	5 x 20	
(F) G 20/ 2.00 A/F	<b>0430900000</b>	10	250 V	2.00 A	5 x 20	
(F) G 20/ 2.50 A/F	<b>0431000000</b>	10	250 V	2.50 A	5 x 20	
(F) G 20/ 3.15 A/F	<b>0431100000</b>	10	250 V	3.15 A	5 x 20	
(F) G 20/ 4.00 A/F	<b>0431200000</b>	10	250 V	4.00 A	5 x 20	
(F) G 20/ 5.00 A/F	<b>0431300000</b>	10	250 V	5.00 A	5 x 20	
(F) G 20/ 6.30 A/F	<b>0431400000</b>	10	250 V	6.30 A	5 x 20	

## Feed-Through Terminals, Roof-Style

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>ZDU 2.5-2</b> - Beige - Blue	1772060000	100	0.5 ... 2.5	0.5 ... 2.5	800 V	24 A	5.1	1706110000 1706120000
	1772070000	100	0.5 ... 2.5	0.5 ... 2.5	800 V	24 A	5.1	
 <b>ZDU 2.5-2/3AN</b> - Beige - Blue	1706010000	100	0.5 ... 2.5	0.5 ... 2.5	800 V	24 A	5.1	1706110000 1706120000
	1706040000	100	0.5 ... 2.5	0.5 ... 2.5	800 V	24 A	5.1	
 <b>ZDU 2.5-2/4AN</b> - Beige - Blue	1706060000	100	0.5 ... 2.5	0.5 ... 2.5	800 V	24 A	5.1	1706110000 1706120000
	1706070000	100	0.5 ... 2.5	0.5 ... 2.5	800 V	24 A	5.1	
 <b>ZDU 4-2</b> - Beige - Blue	1770370000	100	0.5 ... 4.0	0.5 ... 4.0	800 V	32 A	6.1	1770400000 1770880000
	1770840000	100	0.5 ... 4.0	0.5 ... 4.0	800 V	32 A	6.1	
 <b>ZDU 4-2/3AN</b> - Beige - Blue	1770360000	100	0.5 ... 4.0	0.5 ... 4.0	800 V	32 A	6.1	1770400000 1770880000
	1770860000	100	0.5 ... 4.0	0.5 ... 4.0	800 V	32 A	6.1	
 <b>ZDU 6-2/2AN</b> - Beige - Blue	1771380000	50	0.5 ... 10	0.5 ... 6.0	800 V	41 A	8.1	1771440000 1771450000
	1771390000	50	0.5 ... 10	0.5 ... 6.0	800 V	41 A	8.1	
 <b>ZDU 6-2/3AN</b> - Beige - Blue	1771410000	50	0.5 ... 10	0.5 ... 6.0	800 V	41 A	8.1	1771440000 1771450000
	1771420000	50	0.5 ... 10	0.5 ... 6.0	800 V	41 A	8.1	
 <b>ZEI 16-2/1AN (Power Distribution Terminal)</b> - Beige - Blue	1772940000	20	0.5 ... 16	1.5 ... 16	800 V	76 A	14	-
	1772950000	20	0.5 ... 16	1.5 ... 16	800 V	76 A	14	

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25

## Disconnect Terminals, Roof-Style


Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <b>ZTR 2.5-2 / roof-style</b> - Beige - Blue	1779010000	100	0.5 ... 2.5	0.5 ... 1.5	400 V	10 A	5.1	1706110000
	1779120000	100	0.5 ... 2.5	0.5 ... 1.5	400 V	10 A	5.1	

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25







## Earth Terminals, Roof-Style

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions (Beige)*
 ZPE 2.5-2 Yellow/Green	<b>1772090000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800	-	5.1	<b>1706110000</b>
 ZPE 2.5-2/3AN Yellow/Green	<b>1706090000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800	-	5.1	<b>1706110000</b>
 ZPE 2.5-2/4AN Yellow/Green	<b>1706100000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800	-	5.1	<b>1706110000</b>
 ZPE 4-2/2AN Yellow/Green	<b>1770380000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800	-	6.1	<b>1770400000</b>
 ZPE 4-2/3AN Yellow/Green	<b>1770390000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800	-	6.1	<b>1770400000</b>
 ZPE 6-2/2AN Yellow/Green	<b>1771370000</b>	50	0.5 ... 10	0.5 ... 6.0	800	-	8.1	<b>1771440000</b>
 ZPE 6-2/3AN Yellow/Green	<b>1771360000</b>	50	0.5 ... 10	0.5 ... 6.0	800	-	8.1	<b>1771440000</b>
 ZPE 16-2/1AN Yellow/Green	<b>1772960000</b>	100	0.5 ... 16	0.5 ... 16	800	800	12	<b>1772970000</b>
<b>Note</b> * Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25								

## Fuse Terminals, Roof-Style




Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	
	ZTR 2.5-2 / SI roof-style	<b>1779020000</b>	25	0.5 ... 2.5	0.5 ... 1.5	400 V	6.3 A	5.1
	400 V AC/DC	<b>1779030000</b>	25	0.5 ... 2.5	0.5 ... 1.5	400 V	6.3 A	5.1
	10-36 V AC/DC with LED	<b>1779040000</b>	25	0.5 ... 2.5	0.5 ... 1.5	400 V	6.3 A	5.1
	30-70 V AC/DC with LED	<b>1779050000</b>	25	0.5 ... 2.5	0.5 ... 1.5	400 V	6.3 A	5.1
	60-150 V AC/DC with LED	<b>1779060000</b>	25	0.5 ... 2.5	0.5 ... 1.5	400 V	6.3 A	5.1
	140-250 V AC/DC with LED	<b>1779070000</b>	25	0.5 ... 2.5	0.5 ... 1.5	400 V	6.3 A	5.1
<b>Note</b> * Fuse Inserts: Refer to page 43								

Two-Tier Terminals, Roof Style

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <p><b>ZDK 2.5-2</b> - Beige - Blue</p>	<b>1790990000</b>	50	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1791050000</b> <b>1791060000</b>
	<b>1791000000</b>	50	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	
 <p><b>ZDK 2.5-2V*</b> - Beige - Blue</p>	<b>1791030000</b>	50	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1791050000</b> <b>1791060000</b>
	<b>1791040000</b>	50	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	
 <p><b>ZDK PE 2.5</b> - Beige</p>	<b>1805940000</b>	50	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	5.1	<b>1805960000</b>
 <p><b>ZDK 4-2</b> - Beige - Blue</p>	<b>8670750000</b>	50	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.1	<b>8670760000</b> <b>8670620000</b>
	<b>8670850000</b>	50	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.1	
 <p><b>ZDK 4-2V*</b> - Beige - Blue</p>	<b>8671080000</b>	50	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.1	<b>8670760000</b> <b>8670620000</b>
	<b>8704360000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.1	
 <p><b>ZDK 4-2 DU/PE</b> - Beige</p>	<b>8671120000</b>	50	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.1	<b>8670760000</b>

**Note** \* Vertically Cross-Connected 2-Tier Terminal


Terminals with Electronic Components, Roof-Style

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
 <p><b>ZDU 2.5-2/D</b> - With Diode Beige</p>	<b>1779110000</b>	20	0.5 ... 2.5	0.5 ... 1.5	400 V	1 A	5.1	<b>1706110000</b>
 <p><b>ZDK 4-2/D</b> - With Diode Beige</p>	<b>8670520000</b>	50	0.5 ... 4.0	0.5 ... 4.0	800 V	1 A	6.1	<b>8670760000</b>
 <p><b>ZDK 4-2/MOV</b> - With Varistor Beige</p>	<b>8670700000</b>	50	0.5 ... 4.0	0.5 ... 4.0	140 V	1 A	6.1	<b>8670760000</b>

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for Z Series Terminals please refer to page 25




## End Plates for Standard Z-Series Terminals



Type	Colour	Qty*	Order No	For Terminals:
<b>Width 2 mm</b>				
ZAP/TW ZDU 1.5/2 AN	Dark Beige	20	1776030000	ZDU 1.5
ZAP/TW ZDU 1.5/2 AN BL	Blue	20	1776040000	ZDU 1.5 BL
ZAP/TW ZDU 1.5/2 AN OR	Orange	20	1776050000	ZPE 1.5
<b>Width 2 mm</b>				
ZAP/TW ZDU 1.5/3 AN	Dark Beige	20	1776060000	ZDU 1.5/3 AN
ZAP/TW ZDU 1.5/3 AN BL	Blue	20	1776070000	ZDU 1.5/3 AN/BL
AP/TW ZDU 1.5/3 AN OR	Orange	20	1776080000	ZPE 1.5/3 AN
<b>Width 2 mm</b>				
ZAP/TW ZDU 1.5/4 AN	Dark Beige	20	1776090000	ZDU 1.5 2X2 AN
ZAP/TW ZDU 1.5/4 AN BL	Blue	20	1776100000	ZDU 1.5 2X2 AN BL
ZAP/TW ZDU 1.5/4 AN OR	Orange	20	1776110000	ZDU 1.5 4 AN ZDU 1.5 4 AN/BL, ZPE 1.5 4 AN
<b>Width 2 mm</b>				
ZAP/TW ZDK 1.5	Dark Beige	20	1791160000	ZDK 1.5
ZAP/TW ZDK 1.5 BL	Blue	20	1791170000	ZDK 1.5 BL
ZAP/TW ZDK 1.5 OR	Orange	20	1791180000	ZDK 1.5 PE ZDK 1.5 DU-PE, ZDK 1.5 V ZDK 1.5 V BL
<b>Width 2 mm</b>				
ZAP/TW 1	Dark Beige	50	1608740000	ZDU 2.5
ZAP/TW 1 BL	Blue	50	1608750000	ZPE 2.5
ZAP/TW 1 OR	Orange	50	1608760000	ZTR 2.5
<b>Width 2 mm</b>				
ZAP/TW 2 DB	Dark Beige	50	1608770000	ZDU 2.5/3 AN
ZAP/TW 2 BL	Blue	50	1608780000	
ZAP/TW 2 BL	Orange	50	1608790000	
<b>Width 2 mm</b>				
ZAP/TW 3	Dark Beige	50	1608800000	ZDU 2.5/4 AN
ZAP/TW 3 BL	Blue	50	1608810000	ZDU 2.5/2x2 AN
ZAP/TW 3 OR	Orange	50	1608820000	ZTR 2.5/3 AN, ZTR 2.5/4 AN
<b>Width 1.5 mm</b>				
ZAP/TW ZDK 2.5/1.5	Dark Beige	20	1674730000	ZDK 2.5/1.5
ZAP/TW ZDK 2.5/1.5 BL	Blue	20	1748800000	ZDK 2.5/1.5 V
ZAP/TW ZDK 2.5/1.5 OR	Orange	20	1690080000	
<b>Width 1.5 mm</b>				
ZAP ZDLD 2.5-2 N	Dark Beige	20	1782340000	ZDLD 2.5-1 N
ZAP ZDLD 2.5-2 N BL	Blue	20	1782350000	ZDLD 2.5-2 VN
<b>Width 1.5 mm</b>				
ZAP/ZMAK 2.5	Dark Beige	10	1768010000	ZMAK 2.5
<b>Width 1.5 mm</b>				
AP ZDTR 2.5	Dark Beige	20	1745420000	ZDTR 2.5
AP ZDTR 2.5 BL	Blue	20	1798340000	
<b>Width 2 mm</b>				
ZAP/TW 4 DB	Dark Beige	50	1632090000	ZDU 4
ZAP/TW 4 BL	Blue	50	1632100000	ZDU 4
<b>Width 2 mm</b>				
ZAP/TW 4/4 AN	Dark Beige	20	7904210000	ZDU 4/4 AN
ZAP/TW 4/4 AN BL	Blue	20	7904220000	ZDU 4/4 AN BL
ZAP/TW 4/4 AN OR	Orange	20	7904230000	
<b>Width 2 mm</b>				
ZAP/TW 5	Dark Beige	50	1608830000	ZDU 6
ZAP/TW 5 BL	Blue	50	1608840000	ZPE 6
<b>Width 2 mm</b>				
ZSI 2.5	Dark Beige	50	1610840000	ZSI 2.5 Bottom End Plate
<b>Width 2 mm</b>				
ZSI 2.5	Dark Beige	25	1608800000	ZSI 2.5 Top End Plate

Note \* Qty. above is recommended pack sizes

## End Plates for Standard Z-Series Terminals



Type	Colour	Qty*	Order No	For Terminals:
<b>Width 2.7 mm</b> ZAP/TW ZDU 10	Dark Beige	20	<b>1748660000</b>	ZDU 10
ZAP/TW ZDU 10 BL	Blue	20	<b>1764110000</b>	ZPE 10
<b>Width 2.7 mm</b> ZAP/TW 10/16	Dark Beige	20	<b>1749580000</b>	ZDU 10/3 AN
ZAP/TW 10/16 BL	Blue	20	<b>1768520000</b>	ZDU 16/3 AN
<b>Width 2.7 mm</b> ZAP/TW ZDU 16	Dark Beige	20	<b>1745150000</b>	ZDU 16
ZAP/TW ZDU 16 BL	Blue	20	<b>1764100000</b>	ZPE 16
<b>Note</b> * Qty. above is recommended pack sizes				

## End Plates for Roof-Style Z-Series Terminals

Type	Colour	Qty*	Order No	For Terminals:
<b>Width 2 mm</b> ZAP/TW 7	Dark Beige	50	<b>1706110000</b>	ZDU 2.5-2, ZDU 2.5-2/3 AN
ZAP/TW 7 BL	Blue	50	<b>1706120000</b>	ZDU 2.5-2/4 AN ZPE 2.5-2
<b>Width 2 mm</b> ZAP/TW ZDK 2.5-2	Dark Beige	20	<b>1791050000</b>	ZDK 2.5-2 ZDK 2.5-2 PE
ZAP/TW ZDK 2.5-2 BL	Blue	20	<b>1791060000</b>	
<b>Width 2 mm</b> ZAP/TW ZDKPE 2.5-2	Dark Beige	20	<b>1805960000</b>	ZDKPE 2.5-2
<b>Width 2 mm</b> ZAP ZDU 4-2	Dark Beige	50	<b>1770400000</b>	ZDU 4-2 ZDU 4-2/3 AN
ZAP ZDU 4-2 BL	Blue	50	<b>1770880000</b>	
<b>Width 2 mm</b> ZAP ZDU 4-2/4 AN	Dark Beige	50	<b>1807010000</b>	ZDU 4-2/4 AN ZPE 4-2/4 AN
ZAP ZDU 4-2/4 AN BL	Blue	50	<b>1807020000</b>	
<b>Width 2 mm</b> ZAP ZDU 6-2	Dark Beige	50	<b>1771440000</b>	ZDU 6-2 ZDU 6-2/3 AN
ZAP ZDU 6-2 BL	Blue	50	<b>1771450000</b>	
<b>Width 1.8 mm</b> ZAP/ZDU 16-2/1 AN	Dark Beige	10	<b>1772970000</b>	ZPE 16-2/1 AN
<b>Note</b> * Qty. above is recommended pack sizes				

## Pluggable Cross Connections

- Type ZQV



Type	Qty*	Order No	For Terminals:
<b>ZQV 1.5</b>			
ZQV 1.5/2	60	<b>1776120000</b>	Standard: ZDU 1.5..., ZDK 1.5..., ZEI 6
ZQV 1.5/3	60	<b>1776130000</b>	
ZQV 1.5/4	60	<b>1776140000</b>	
ZQV 1.5/5	60	<b>1776150000</b>	
ZQV 1.5/10	20	<b>1776200000</b>	



<b>ZQV 2.5</b>			
ZQV 2.5/2	60	<b>1608860000</b>	Standard: ZDU 2.5..., ZDK 2.5/1.5..., ZTR 2.5..., ZDTR 2.5..., ZSI 2.5..., ZRV 1.5..., ZIA 1.5..., ZEI 16
ZQV 2.5/3	60	<b>1608870000</b>	
ZQV 2.5/4	60	<b>1608880000</b>	
ZQV 2.5/5	20	<b>1608890000</b>	Roof Style: ZDU 2.5-2..., ZDK 2.5-2..., ZTR 2.5-2..., ZDLD 2.5-2..., ZDKPE 2.5-2, ZDU 2.5 S, ZNT 2.5 S, ZEI 16-2/1 AN
ZQV 2.5/6	20	<b>1608900000</b>	
ZQV 2.5/7	20	<b>1608910000</b>	
ZQV 2.5/8	20	<b>1608920000</b>	
ZQV 2.5/9	20	<b>1608930000</b>	
ZQV 2.5/10	20	<b>1608940000</b>	
ZQV 2.5/20	20	<b>1908960000</b>	
ZQV 2.5/50	10	<b>1697540000</b>	



<b>ZQV 4</b>			
ZQV 4/2	60	<b>1608950000</b>	Standard: ZDU 4..., ZDK 4/S..., ZEI 16
ZQV 4/3	60	<b>1608960000</b>	Roof Style: ZDU 4-2..., ZDU 4 S..., ZEI 16-2/1 AN
ZQV 4/4	60	<b>1608970000</b>	
ZQV 4/5	20	<b>1608980000</b>	
ZQV 4/6	20	<b>1608990000</b>	
ZQV 4/7	20	<b>1609000000</b>	
ZQV 4/8	20	<b>1609010000</b>	
ZQV 4/9	20	<b>1609020000</b>	
ZQV 4/10	20	<b>1609030000</b>	



<b>ZQV 6</b>			
ZQV 6/2	60	<b>1627850000</b>	Standard: ZDU 6..., ZDK 6/S..., ZTL 6..., ZEI 16 ZSI 2.5
ZQV 6/3	60	<b>1627860000</b>	Roof Style: ZDU 6-2..., ZDU 6 S..., ZB 16-2/1 AN
ZQV 6/4	60	<b>1627870000</b>	
ZQV 6/32	10	<b>1733640000</b>	



<b>ZQV 10/2</b>			
ZQV 10/2	25	<b>1739680000</b>	Standard: ZDU 10..., ZDU 10 NT Roof Style: ZDU 10 S



<b>ZQV 16/2</b>			
ZQV 16/2	25	<b>1739690000</b>	Standard: ZDU 16 ZPE 16 Roof Style: ZDU 16 S ZPE 16 S



<b>ZQV 35/2</b>			
ZQV 35/2	10	<b>1739700000</b>	Standard: ZDU 35 ZPE 35

**Note** \* Qty. above is recommended pack sizes

Pluggable Cross Connections



Type	Qty*	Order No	For Terminals:
<b>ZQV 2.5</b>			
ZQV 2.5N/2	60	<b>1693800000</b>	Standard: ZT 2.5..., ZDT 2.5..., ZP 2.5
ZQV 2.5N/3	60	<b>1693810000</b>	Roof Style: ZDUA 2.5-2..., ZDUA 2.5-2N ZDL 2.5
ZQV 2.5N/4	60	<b>1693820000</b>	
ZQV 2.5N/5	20	<b>1693830000</b>	
ZQV 2.5N/6	20	<b>1693840000</b>	
ZQV 2.5N/7	20	<b>1693850000</b>	
ZQV 2.5N/8	20	<b>1693860000</b>	
ZQV 2.5N/9	20	<b>1693870000</b>	
ZQV 2.5N/10	20	<b>1693880000</b>	
ZQV 2.5N/50	5	<b>1693890000</b>	



<b>ZQB 2.5</b>			
ZQB 2.5-2	50	<b>1677120000</b>	Roof Style: ZDUB 2.5-2/4 AN ZDU 2.5-2/4 AN



<b>ZQS 2.5</b>			
ZQS 2.5/2	20	<b>1633200000</b>	Standard: ZSI 2.5/2
ZQS 2.5/3	20	<b>1633210000</b>	
ZQS 2.5/4	20	<b>1633220000</b>	
ZQS 2.5/5	20	<b>1633230000</b>	



<b>ZVQ 2.5/1.5</b>			
ZVQ 2.5/1.5	50	<b>1720700000</b>	Standard: ZDK 2.5/1.5..., ZDT 2.5/2 Roof Style: ZDLD 2.5-2

**Note** \* Qty. above is recommended pack sizes

End Brackets




Type	Order No	Qty*
ZEW 35	<b>9540000000</b>	20

**Note** \* Qty. above is recommended pack sizes




## Push In

Cartridge-Series, Weidmüller is presenting a new generation of terminals that offers several unique benefits in one product family. The „Push-in“ technology along with the ability to reduce terminals required from five to three to perform the same function is the hallmark of this technology.


- In the past you would have needed five different types of terminals to wire up to 16mm<sup>2</sup> (6AWG). With the P-Series terminals, PDU 2.5/4, PDU6/10 and PDU 16, the same can be accomplished with now three terminals.
- Users of the Push In connection system are impressed by the faster wiring time that is easy and safe
- Direct insertion of solid wires
- Direct insertion of flexible wires fitted with ferrules
- Safer to use (spring stop - protects the spring, conductor stop)
- Wemid insulating material
- Cross-connections, also pluggable

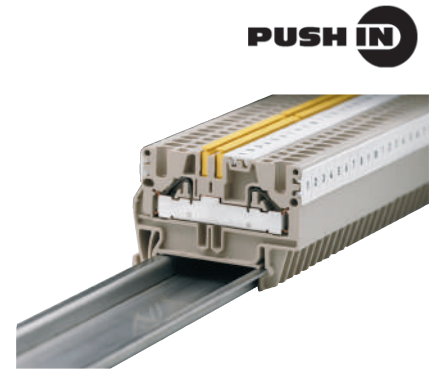


## Feed-Through Terminals

Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*	
	PDU 2.5/4	<b>1896110000</b>	100	Beige	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1896300000</b>
	PDU 2.5/4 BL	<b>1896230000</b>	100	Blue	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1896300000</b>
	PDU 2.5/4 3AN	<b>1896120000</b>	100	Beige	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1894800000</b>
	PDU 2.5/4 3AN BL	<b>1896240000</b>	100	Blue	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1896480000</b>
	PDU 2.5/4 4AN	<b>1896130000</b>	100	Beige	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1896320000</b>
	PDU 2.5/4 4AN BL	<b>1896250000</b>	100	Blue	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1896320000</b>
	PDU 6/10	<b>1896140000</b>	100	Beige	2.5 ... 10	2.5 ... 10 / 2.5 ... 10	800 V	57 A	<b>1896330000</b>
	PDU 6/10 BL	<b>1896270000</b>	100	Blue	2.5 ... 10	2.5 ... 10 / 2.5 ... 10	800 V	57 A	<b>1896330000</b>
	PDU 6/10 3AN	<b>1896150000</b>	100	Beige	2.5 ... 10	2.5 ... 10 / 2.5 ... 10	800 V	57 A	<b>1896340000</b>
	PDU 6/10 3AN BL	<b>1896280000</b>	100	Blue	2.5 ... 10	2.5 ... 10 / 2.5 ... 10	800 V	57 A	<b>1896340000</b>
	PDU 16	<b>1896400000</b>	100	Beige	2.5 ... 16	2.5 ... 16 / 2.5 ... 16	800 V	76 A	<b>1896290000</b>
	PDU 16 BL	<b>1896220000</b>	100	Blue	2.5 ... 16	2.5 ... 16 / 2.5 ... 16	800 V	76 A	<b>1896290000</b>
PEI 16	PEI 16	<b>1918780000</b>	10	Beige	2.5 ... 16	2.5 ... 16 / 2.5 ... 16	800 V	76 A	-
	PEI 16 BL	<b>1918790000</b>	10	Blue	2.5 ... 16	2.5 ... 16 / 2.5 ... 16	800 V	76 A	-
<b>Note</b>	* Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for P Series Terminals please refer to page 34								

## Earth Terminals


Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*	
	PPE 2.5/4	<b>1896170000</b>	100	Green/Yellow	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	<b>1896300000</b>	
	PPE 2.5/4 3AN	<b>1896200000</b>	100	Green/Yellow	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	<b>1896480000</b>	
	PPE 2.5/4 4AN	<b>1896160000</b>	50	Green/Yellow	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	<b>1896320000</b>	
	PPE 6/10	<b>1896180000</b>	100	Green/Yellow	0.5 ... 10	1.5 ... 10 / 1.5 ... 10	800 V	<b>1896330000</b>	
	PPE 6/10 3AN	<b>1896190000</b>	100	Green/Yellow	0.5 ... 10	1.5 ... 10 / 1.5 ... 10	800 V	<b>1896340000</b>	
	PPE 16	<b>1896210000</b>	100	Green/Yellow	0.5 ... 10	1.5 ... 10 / 1.5 ... 16	800 V	<b>1896290000</b>	
	<b>Note</b>	* Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for P Series Terminals please refer to page 34							

Two-Tier Terminals




Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*
PDK 2.5/4	<b>1918770000</b>	100	Beige	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1919720000</b>
PDK 2.5/4 BL	<b>1918760000</b>	100	Blue	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1919720000</b>
PDK 2.5/4 V	<b>1918730000</b>	100	Beige	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1919720000</b>
PDK 2.5/4 V BL	<b>1918680000</b>	100	Blue	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1919720000</b>
PDK 2.5/4 N/L	<b>1918740000</b>	100	Beige	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1919720000</b>
PDK 2.5/4I-PE	<b>1918720000</b>	50	Beige	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	32 A	<b>1919720000</b>
PDK 2.5/4P	<b>1918710000</b>	100	Green	0.5 ... 6.0	0.2 ... 4 / 0.5 ... 4	800 V	-	<b>1919720000</b>


Disconnect Terminals




Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*
<b>PDL:</b> 4/TR/DU 0 TNHE	<b>1899210000</b>	50	Beige	0.5 ... 6.0	0.5 ... 4 / 0.5 ... 4	400 V	20 A	<b>1883210000</b>



<b>PDL:</b> 4/TR/DU/PE 0 TNHE	<b>1899220000</b>	50	Beige	0.5 ... 6.0	0.5 ... 4 / 0.5 ... 4	400 V	20 A	<b>1883210000</b>
-------------------------------------	-------------------	----	-------	-------------	-----------------------	-------	------	-------------------



<b>PDL:</b> 4/TR/DU	<b>1899190000</b>	50	Beige	0.5 ... 6.0	0.5 ... 4 / 0.5 ... 4	400 V	20 A	<b>1883210000</b>
------------------------	-------------------	----	-------	-------------	-----------------------	-------	------	-------------------



<b>PDL:</b> 4/TR/DU/PE	<b>1899200000</b>	50	Beige	0.5 ... 6.0	0.5 ... 4 / 0.5 ... 4	400 V	20 A	<b>1883210000</b>
---------------------------	-------------------	----	-------	-------------	-----------------------	-------	------	-------------------

Holder for Cartridge

Fuse 5x20mm




Type	Order No	
SIHA 3/G20	<b>7921560000</b>	For PDL 4 Terminals


Distribution Terminals



Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*
<b>N Conductor Disconnect Terminal</b> PNT 2.5/4	<b>1896360000</b>	50	Blue	0.5 ... 6.0	0.5 ... 4 / 0.5 ... 4	250 V	32 A	<b>1896390000</b>















PNT 6/10	<b>1896370000</b>	100	Blue	1.5 ... 10	2.5 ... 10 / 2.5 ... 10	250 V	57 A	<b>1896100000</b>
----------	-------------------	-----	------	------------	-------------------------	-------	------	-------------------









PNT 16	<b>1896350000</b>	100	Blue	2.5 ... 16	2.5 ... 16 / 2.5 ... 16	250 V	76 A	<b>1896380000</b>
--------	-------------------	-----	------	------------	-------------------------	-------	------	-------------------

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for P-Series Terminals please refer to page 34


## Distribution Terminals

Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*
  <b>Distribution Terminals</b> PDL 4 S/NT/L/PE	<b>1837060000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1837070000</b>
  PDL 4 S/L/L	<b>1837030000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1837070000</b>
  PDL 4 S/L	<b>1847610000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1837070000</b>
  PDL 4 S/N/L/PE	<b>1837050000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1837070000</b>
  PDL 4 S/N/L	<b>1847630000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1837070000</b>
  PDL 4 S/N	<b>1847620000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1837070000</b>
<b>Note</b>	* Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for P-Series Terminals please refer to page 34							


Distribution Terminals

Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*
 <p><b>Distribution Terminals</b> PDL 4 S/L/L/PE</p>	<b>1837040000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1837070000</b>
 <p>PDL 4 NT/L/PE</p>	<b>1882620000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	20 A	<b>1883210000</b>
 <p>PDL 4 NT/L</p>	<b>1882600000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	20 A	<b>1883210000</b>
 <p>PDL 4 N/L/PE</p>	<b>1899180000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1883210000</b>
 <p>PDL 4 L/L/PE</p>	<b>1882610000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1883210000</b>
 <p>PDL 4 L/L</p>	<b>1882590000</b>	50	Beige	0.5 ... 6 / 1.5 ... 4	0.5 ... 4 / 0.5 ... 4	400 V	32 A	<b>1883210000</b>
<p><b>Note</b> * Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for P Series Terminals please refer to page 34</p>								

Modular Fuse Terminals

Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*
 <p>PSI 6/10</p>	<b>1083050000</b>	25	Dark Beige	1.5...10	1.5...6	250 V	6.3 A	<b>1165320000</b>









Test-disconnect Terminals

Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	End Plates and Partitions*
 <p>PTR 2.5/4</p>	<b>1933950000</b>	50	Dark Beige	0.5...6	0.5...4	500 V	22 A	<b>1934680000</b>



## Marshalling and Distribution Terminals

\*For full product details and accessories please request full datasheet.

Type	Order No	Qty*	Colour	Solid/Stranded Rated Connection mm <sup>2</sup>	Flexible with Ferrule Rated Connection mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions **
 <p><b>PRV 4 Marshalling 16 Connections</b> PRV 4 SW 35X15 RT (For 15mm High Rail) PRV 4 SW 35X15 WS (For 15mm High Rail) PRV 4 BL 35X15 WS (For 15mm High Rail)</p>	1173810000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	10 A	9.2	End Plate 1173750000
	1173820000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	10 A	9.2	Partition 1173700000
	1173920000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	10 A	9.2	Printed Partitions also available
 <p><b>PRV 8 Marshalling 32 Connections</b> PRV 8 SW 35X15 RT/WS (For 15mm High Rail) PRV 8 SW 35X15 WS/RT (For 15mm High Rail) PRV 8 BL 35X15 WS (For 15mm High Rail)</p>	1173830000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	10 A	9.2	Printed Partitions also available
	1173840000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	10 A	9.2	Printed Partitions also available
	1173930000	20	Blue	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	10 A	9.2	Printed Partitions also available
 <p><b>PRV 8 Marshalling 32 Connections</b> PRV 8 SW 35X15 RT/WS (For 15mm High Rail) PRV 8 SW 35X15 WS/RT (For 15mm High Rail) PRV 8 BL 35X15 WS (For 15mm High Rail)</p>	1173740000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	End Plate 1173720000
	1173780000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	Partition 1173670000
	1173900000	20	Blue	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	Printed Partitions also available
 <p><b>PRV 8 Marshalling 32 Connections</b> PRV 8 SW 35X7.5 RT/WS (For 7.5mm High Rail) PRV 8 SW 35X7.5 WS/RT (For 7.5mm High Rail) PRV 8 BL 35X7.5 WS (For 7.5mm High Rail)</p>	1173790000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	Printed Partitions also available
	1173800000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	Printed Partitions also available
	1173910000	20	Blue	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	Printed Partitions also available
 <p><b>PRV 16 Marshalling 64 Connections</b> PRV 16 SW 35X15 RT/WS (For 15mm High Rail) PRV 16 SW 35X15 WS/RT (For 15mm High Rail)</p>	1173620000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	5 A	9.2	Partition 1173630000
	1173650000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	5 A	9.2	Printed Partitions also available
	1173680000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	5 A	9.2	Printed Partitions also available
 <p><b>PRV 16 Marshalling 64 Connections</b> PRV 16 SW 35X7.5 RT/WS (For 7.5mm High Rail) PRV 16 SW 35X7.5 WS/RT (For 7.5mm High Rail)</p>	1173710000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	5 A	9.2	Printed Partitions also available
	1173620000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	5 A	9.2	Printed Partitions also available
	1173650000	20	Black	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	5 A	9.2	Printed Partitions also available
 <p><b>PPV 4 Power Distribution 16 Connections</b> PPV 4 GR 35X15 WS (For 15mm High Rail)</p>	1173880000	20	Grey	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	17.5 A	9.2	End Plate 1173750000 Grey 1211450000
	1173890000	20	Grey	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	17.5 A	9.2	Partition 1173700000
	1173850000	20	Grey	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	End Plate 1173720000 Grey 1211460000
 <p><b>PPV 8 Power Distribution 32 Connections</b> PRV 8 GR 35X15 WS (For 15mm High Rail)</p>	1173850000	20	Grey	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	End Plate 1173720000 Grey 1211460000
	1173870000	20	Grey	0.2 ... 1.5/ 0.2 ... 1.5	0.2 ... 1.5 /0.2 ... 1.0 (1.5mm <sup>2</sup> )	250 V	8 A	9.2	Partition 1173670000

Note \* For use with 1.5mm<sup>2</sup> conductors apply ferrules with 10mm stripping length

## End Plates for P-Series Terminals



Type	Qty*	Order No	Colour	For Terminals:
<b>Width 3 mm</b> PAP 2.5/4	50	<b>1896300000</b>	Dark Beige	PDU 2.5/4 PDU 2.5/4 BL PPE 2.5/4
<b>Width 3 mm</b> PAP 2.5/4/3 AN	50	<b>1896480000</b>	Dark Beige	PDU 2.5/4/3AN PDU 2.5/F/3AN BL PPE 2.5/4/3AN
<b>Width 3 mm</b> PAP 2.5/4/4 AN	50	<b>1896320000</b>	Dark Beige	PDU 2.5/4AN PDU 2.5/4/4AN BL PPE 2.5/4/4AN
<b>Width 3 mm</b> PAP PDU6/10	100	<b>1896330000</b>	Dark Beige	PDU 6/10 PDU 6/10 BL PPE 6/10
<b>Width 3 mm</b> PAP PDU6/10/3 AN	100	<b>1896340000</b>	Dark Beige	PDU 6/10/3AN PDU 6/10/3AN BL PPE 6/10/3AN
<b>Width 3 mm</b> PAP 16	100	<b>1896290000</b>	Dark Beige	PDU 16 PPE 16
<b>Width 3 mm</b> PAP PDK 2.5/4	100	<b>1919720000</b>	Dark Beige	PDK 2.5/4 PDK 2.5/4/4/4V PDK 2.5/4 N/L PDK 2.5/4 L/PE PDK 2.5/4 PE
<b>Width 3 mm</b> PAP PDL 4	20	<b>1883210000</b>	Dark Beige	PDL 4/TR/DU 0 TNHE PDL 4/TR/DU/PE 0 TNHE PDL 4/TR/DU PDL 4/TR/DU/PE
<b>Width 3 mm</b> PHP PNT 2.5/4	50	<b>1896390000</b>	Blue	PNT 2.5/4
PHP/PNT 6/10	50	<b>1896100000</b>	Blue	PNT 6/10
<b>Width 3 mm</b> PAP PDL 4S	20	<b>1837070000</b>	Dark Beige	PDL 4 S/NT/L/PE PDL 4 S/L/L PDL 4 S/L PDL 4 S/N/L/PE PDL 4 S/N PDL 4 S/L/L/PE
<b>Width 3 mm</b> PAP PDL 4S	20	<b>1832100000</b>	Dark Beige	PDL 4NT/L/PE PDL 4NT/L PDL 4N/L/PE PDL 4L/L/PE PDL 4L/L

Note \* Qty. above is recommended pack sizes

## Pluggable Cross Connections


- Type ZQV



Type	Qty*	Order No	For Terminals:
<b>ZQV 2.5</b>			
ZQV 2.5/2	60	<b>1608860000</b>	PDU 2.5/4, PDU 2.5/4 3AN, PDU 2.5/4 4AN
ZQV 2.5/3	60	<b>1608870000</b>	PDK 2.5/4, PDK 2.5/4V, PDK 2.5/4 NL, PDK 2.5/4 L-PE
ZQV 2.5/4	60	<b>1608880000</b>	PDL 4.... all variants
ZQV 2.5/10	20	<b>1608940000</b>	PNT 2.5/4
ZQV 2.5/20	20	<b>1908960000</b>	
<b>ZQV 6N</b>			
ZQV 6N/2	60	<b>1906210000</b>	PDU 6/10, PDU 6/10 3 AN
ZQV 6N/3	60	<b>1906220000</b>	PNT 6/10
ZQV 6N/4	60	<b>1906230000</b>	
ZQV 6N/20	20	<b>1906240000</b>	
<b>ZQV 16</b>			
ZQV 16/2	25	<b>1736900000</b>	PDU 16, PEI 16

**Note** \* Qty. above is recommended pack sizes

## End Brackets













Type	Order No	Qty*
ZEW 35	<b>9540000000</b>	20

**Note** \* For use with 1.5mm<sup>2</sup> conductors apply ferrules with 10mm stripping length

**Feed-Through Terminals**

- Fits on TS 35 din rail
- PA = Polyamide





Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*	
 <b>SAKD 2.5 D/35</b>	PA	<b>0268860000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	5	<b>0150960000</b>
	PA Blue	<b>0268880000</b>	100	0.5 ... 4.0	0.5 ... 2.5	500 V	24 A	5	<b>0150980000</b>
 <b>SAK 2.5/35</b>	PA	<b>0380460000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	6	<b>0460560000</b>
	PA Blue	<b>0380480000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	24 A	6	<b>0460580000</b>
 <b>SAK 4/35</b>	PA	<b>0443660000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.5	<b>0117960000</b>
	PA Blue	<b>0443680000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.5	<b>0117980000</b>
	PA Orange	<b>1323660000</b>	100	0.5 ... 6.0	0.5 ... 4.0	800 V	32 A	6.5	
 <b>SAK 6/35</b>	PA	<b>0380560000</b>	100	0.5 ... 10	0.5 ... 6.0	800 V	41 A	8	<b>0117960000</b>
	PA Blue	<b>0380580000</b>	100	0.5 ... 10	0.5 ... 6.0	800 V	41 A	8	<b>0117980000</b>
 <b>SAK 10/35</b>	PA	<b>0443760000</b>	100	1.5 ... 10	1.5 ... 10	800 V	57 A	10	<b>0117960000</b>
	PA Blue	<b>0443780000</b>	100	1.5 ... 10	1.5 ... 10	800 V	57 A	10	<b>0117980000</b>
 <b>SAK 16/35</b>	PA	<b>0380660000</b>	50	2.5 ... 10	4.0 ... 16	1000 V	76 A	12	<b>0271160000</b>
	PA Blue	<b>0380680000</b>	50	2.5 ... 10	4.0 ... 16	1000 V	76 A	12	<b>0271180000</b>
 <b>SAK 35 N/35</b>	PA	<b>0608260000</b>	20	2.5 ... 16	2.5 ... 35	1000 V	125 A	16	<b>0303680000</b>
	PA Hexagon Socket	<b>0608360000</b>	20	2.5 ... 16	2.5 ... 35	1000 V	125 A	16	<b>0303680000</b>
 <b>SAK 35/35</b>	PA	<b>0380760000</b>	20	6 ... 16	10 ... 35	800 V	125 A	18	<b>0303660000</b>
	PA Hexagon Socket	<b>0582460000</b>	20	6 ... 16	10 ... 35	800 V	125 A	18	<b>0303660000</b>
	PA Blue	<b>0380780000</b>	20	6 ... 16	10 ... 35	800 V	125 A	18	<b>0303680000</b>
 <b>SAK 70/35</b>	PA Hexagon Socket	<b>0139160000</b>	10	16 ... 70 6 x 13 x 0.5	16 ... 35	1000 V	192 A	22	<b>0340960000</b>

**Note** \* Qty. above is recommended pack sizes  
 \* For more information in regards to End Plates and Partitions for SAK Series Terminals please refer to page 42



### Feed-Through Terminals with Two Tiers


- Fits on TS 35 din rail
- KrG = Melamine
- PA = Polyamide



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
<b>DK 4 Q</b> PA PA Blue	<b>0590160000</b>	100	0.5 ... 2.5	0.5 ... 4.0	500 V	2 x 32 A	6	<b>1397160000</b> <b>1397180000</b>
	<b>0590180000</b>	100	0.5 ... 2.5	0.5 ... 4.0	500 V	2 x 32 A	6	
<b>DK 4 QV</b> PA PA Blue	<b>0363660000</b>	100	0.5 ... 4.0	0.5 ... 4.0	500 V	2 x 32 A	6	<b>1397160000</b> <b>1397180000</b>
	<b>0353680000</b>	100	0.5 ... 4.0	0.5 ... 4.0	500 V	32 A	6	
<b>DK 4</b> PA PA Blue	<b>0527660000</b>	100	0.5 ... 4.0	0.5 ... 4.0	500 V	2 x 32 A	6	<b>0359260000</b> <b>0359280000</b>
	<b>0527680000</b>	100	0.5 ... 4.0	0.5 ... 4.0	500 V	2 x 32 A	6	
<b>Note</b>	* Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for SAK Series Terminals please refer to page 42							

### Earth Terminals


- Fits on TS 35 din rail




Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)
EK 2.5	<b>0661060000</b>	100	0.5 ... 4.0	0.5 ... 2.5	800 V	-	6
EK 4	<b>0661160000</b>	100	0.5 ... 4.0	0.5 ... 4.0	800 V	-	6.5
EK 16	<b>0190160000</b>	50	2.5 ... 16	4 ... 16	800 V	-	12
EK 35	<b>0661460000</b>	20	16 ... 50	10 ... 35	800 V	-	16
<b>Note</b>	* Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for SAK Series Terminals please refer to page 42						

**Disconnect Terminals**


- PA = Polyamide Material



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
<b>SAKR for TS 35</b>								
Beige	<b>0172160000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	10 A	6.5	<b>0211360000</b>
Blue	<b>0172180000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	10 A	6.5	<b>0211380000</b>
With STB (Test Point)								
Beige	<b>0183360000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	10 A	6.5	<b>0211360000</b>
Blue	<b>0183380000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	10 A	6.5	<b>0211380000</b>
<b>SAKR for TS 32</b>								
Beige	<b>0412160000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	10 A	6.5	<b>0211360000</b>
Blue	<b>0412180000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	10 A	6.5	<b>0211380000</b>
With STB (Test Point)								
Beige	<b>0183360000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	10 A	6.5	<b>0211360000</b>
Blue	<b>0183380000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	10 A	6.5	<b>0211380000</b>
<b>SAKC 10/35</b>								
Medium yellow	<b>1404520000</b>	50	0.5 ... 10	0.5 ... 10	500 V	27 A	12	<b>0146720000</b>



**Fuse Terminals**

- With universal foot for TS 35 or TS 32 Din Rail
- PA Polyamide Material




ASK

Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
<b>ASK</b>								
500 V AC/DC	<b>0474560000</b>	100	0.5 ... 4.0	0.5 ... 4.0	500 V AC/DC	6.3 A	8	<b>0380360000</b>
LED 230 V AC	<b>0225760000</b>	25	0.5 ... 4.0	0.5 ... 4.0	230 V AC	6.3 A	8	<b>0380360000</b>
LED 230 V DC	<b>0225660000</b>	25	0.5 ... 4.0	0.5 ... 4.0	230 V DC	6.3 A	8	<b>0380360000</b>
LED 115 V AC	<b>0225560000</b>	25	0.5 ... 4.0	0.5 ... 4.0	115 V AC	6.3 A	8	<b>0380360000</b>
LED 115 V DC	<b>0225460000</b>	25	0.5 ... 4.0	0.5 ... 4.0	115 V DC	6.3 A	8	<b>0380360000</b>
LED 60 V DC	<b>0226460000</b>	25	0.5 ... 4.0	0.5 ... 4.0	60 V DC	6.3 A	8	<b>0380360000</b>
LED 48 V AC	<b>0225360000</b>	25	0.5 ... 4.0	0.5 ... 4.0	48 V AC	6.3 A	8	<b>0380360000</b>
LED 48 V DC	<b>0225260000</b>	25	0.5 ... 4.0	0.5 ... 4.0	48 V DC	6.3 A	8	<b>0380360000</b>
LED 24 V AC	<b>0222860000</b>	25	0.5 ... 4.0	0.5 ... 4.0	24 V AC	6.3 A	8	<b>0380360000</b>
LED + - 24 V DC	<b>7940005669</b>	25	0.5 ... 4.0	0.5 ... 4.0	24 V DC	6.3 A	8	<b>0380360000</b>
<b>KDKS</b>								
LED 230 V AC	<b>8148910000</b>	25	0.5 ... 4.0	0.5 ... 4.0	230 V AC	6.3 A	8	<b>9503340000</b>
LED 115 V AC	<b>8142840000</b>	25	0.5 ... 4.0	0.5 ... 4.0	115 V AC	6.3 A	8	<b>9503340000</b>
LED 48 V AC	<b>8148920000</b>	25	0.5 ... 4.0	0.5 ... 4.0	48 V AC	6.3 A	8	<b>9503340000</b>
LED 24 V AC	<b>8148930000</b>	25	0.5 ... 4.0	0.5 ... 4.0	24 V AC	6.3 A	8	<b>9503340000</b>
LED + - 24 V DC	<b>8146450000</b>	25	0.5 ... 4.0	0.5 ... 4.0	24 V DC	6.3 A	8	<b>9503340000</b>



KDKS






KDKS

**Note** \* Fuse Inserts at page 43  
 \* Qty. above is recommended pack sizes  
 \* For more information in regards to End Plates and Partitions for SAK Series Terminals please refer to page 42

**Fuse Terminals with Two-Tiers**





- Fits on TS 35
- PA Polyamide Material



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
KDKS 1	<b>9503310000</b>	50	0.5 ... 4.0	0.5 ... 4.0	500 V	6.3 A	8	<b>9503330000</b>
KDKS 1/PE (PA)	<b>9528110000</b>	50	0.5 ... 4.0	0.5 ... 4.0	500 V	6.3 A	8	<b>9503330000</b>
KDKS 1/PE (Wemid)	<b>9532450000</b>	50	0.5 ... 4.0	0.5 ... 4.0	500 V	6.3 A	8	<b>9532470000</b>
<b>Note</b> * Fuse Inserts at page 43								

**Fuse Terminals with One-Tier**







- Fits on TS 35
- KrG Melamine Material



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
<b>SAKS</b>								
500 V AC/DC	<b>0501620000</b>	20	0.5 ... 10	0.5 ... 10	-	10 A	13	<b>0191320000</b>
230 V DC - Neon Lamp	<b>0199920000</b>	10	0.5 ... 10	0.5 ... 10	-	10 A	13	<b>0191320000</b>
115 V DC - Neon Lamp	<b>8068330000</b>	10	0.5 ... 10	0.5 ... 10	-	10 A	13	<b>0191320000</b>
48 V AC LED	<b>0214020000</b>	10	0.5 ... 10	0.5 ... 10	-	10 A	13	<b>0191320000</b>
24 V AC LED	<b>1111320000</b>	10	0.5 ... 10	0.5 ... 10	-	10 A	13	<b>0191320000</b>
+ - 24 V DC LED	<b>0225820000</b>	10	0.5 ... 10	0.5 ... 10	-	10 A	13	<b>0191320000</b>
<b>SAKS 1/35</b>								
KrG : Fuse 20 x 5 without indicator	<b>0501620000</b>	20	0.5 ... 10	0.5 ... 10	500 V	6.3 A	13	<b>0191320000</b>
<b>SAKS 1/35/G25</b>								
Fuse 25 x 5 with indicator	<b>0501520000</b>	20	0.5 ... 10	0.5 ... 10	500 V	6.3 A	13	<b>0191320000</b>
<b>SAKS 3</b>								
Fuse 1 1/4" x 1/4" DEF 63	<b>0667520000</b>	20	0.5 ... 10	0.5 ... 10	500 V	10 A	13	<b>0191320000</b>
<b>Note</b> * Fuse Inserts at page 43 * Qty. above is recommended pack sizes * For more information in regards to End Plates and Partitions for SAK Series Terminals please refer to page 42								

**Fuse Terminals**


- Fits on TS 35
- KrG Melamine Material

	Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates and Partitions*
	<b>SAKS 2</b> D Fuses E 16	<b>1368720000</b>	20	0.5 ... 10	0.5 ... 10	500 V	10 A	28	
	<b>SAKS 4</b> D 01 Fuses E 14	<b>0501820000</b>	20	0.5 ... 10	0.5 ... 10	400 V	16 A	24	
	<b>SAKS 5</b> D 02 Fuses E 18	<b>0502120000</b>	20	1.5 ... 16	1.5 ... 16	400 V	63 A	28	
	<b>KSKM 1</b> Fuses 5 x 20	<b>9509600000</b>	20	-	0.5 ... 10	250 V	6.3 A	13	<b>9509630000</b>
	<b>KSKM 2</b> Fuses 1" x 1/4"	<b>9509610000</b>	20	-	0.5 ... 10	250 V	13 A	13	<b>9509630000</b>
	<b>KSKM 3</b> Fuses 1 1/4" x 1/4"	<b>9509620000</b>	20	-	0.5 ... 10	440 V	10 A	13	<b>9509630000</b>
<b>Note</b> <ul style="list-style-type: none"> <li>* Fuse Inserts at page 43</li> <li>* Qty. above is recommended pack sizes</li> <li>* For more information in regards to End Plates and Partitions for SAK Series Terminals please refer to page 42</li> </ul>									



## Initiator and Actuator Terminals

- Fits on TS 35
- KrG Melamine Material



Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)	End Plates Order No
DLD 2.5	<b>1784180000</b>	50	0.5 ... 4.0	0.5 ... 2.5	250 V	24 A	6	<b>1784210000</b>
DLI 2.5	<b>1783820000</b>	100	0.5 ... 4.0	0.5 ... 2.5	250 V	24 A	6	<b>1783550000</b>
MAK 2.5	<b>1615270000</b>	50	1.5 ... 4.0	0.5 ... 2.5	250 V	24 A	6	<b>7917000000</b>
	<b>1631650000</b>	50	1.5 ... 4.0	0.5 ... 2.5	250 V	24 A	6	

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for SAK Series Terminals please refer to page 42

## Terminal Strips

- Temperature range up to 130°C
- KrG Melamine Material




Type	Order No	Qty*	Solid Stranded mm <sup>2</sup>	Flexible with Ferrule mm <sup>2</sup>	Rated Voltage	Rated Current	Width (mm)
<b>MK 3 ... 12</b>							
MK 3/2 KrG	<b>0273820000</b>	100	0.5 ... 2.5	0.5 ... 1.5	400 V	24 A	15
MK 3/3 KrG	<b>0273920000</b>	50	0.5 ... 2.5	0.5 ... 1.5	400 V	24 A	15
MK 3/4 KrG	<b>0274020000</b>	50	0.5 ... 2.5	0.5 ... 1.5	400 V	24 A	15
MK 3/6 KrG	<b>0274220000</b>	50	0.5 ... 2.5	0.5 ... 1.5	400 V	24 A	15
MK 3/8 KrG	<b>0274420000</b>	25	0.5 ... 2.5	0.5 ... 1.5	400 V	24 A	15
MK 3/10 KrG	<b>0274620000</b>	20	0.5 ... 2.5	0.5 ... 1.5	400 V	24 A	15
MK 3/12 KrG	<b>0243520000</b>	20	0.5 ... 2.5	0.5 ... 1.5	400 V	24 A	15
<b>BK 2 ... 12</b>							
BK 2CRN	<b>0624720000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	32 A	22
BK 3CRN	<b>0624920000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	32 A	22
BK 4CRN	<b>0625120000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	32 A	22
BK 6CRN	<b>0625220000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	32 A	22
BK 12CRN	<b>0625320000</b>	100	0.5 ... 4.0	0.5 ... 4.0	400 V	32 A	22

**Note** \* Qty. above is recommended pack sizes  
\* For more information in regards to End Plates and Partitions for SAK Series Terminals please refer to page 42

## End Plates and Partitions for SAK Terminals

- PA = Polyamide
- KrG = Melamine



Type		Width	Colour	Qty*	Order No KrG	Order No PA	For Terminals:
AP SAKD 2.5 N	End Plate	1.5mm	Beige	20		<b>0150960000</b>	SAK D 2.5/35
AP SAKD 2.5 N BL	End Plate	1.5mm	Blue	20		<b>0150980000</b>	
TW SAK D 2.5 N	Partition	1.5mm	Beige	20		<b>0191860000</b>	
TW SAK D 2.5 N BL	Partition	1.5mm	Blue	20		<b>0191880000</b>	
AP SAK 2.5	End Plate	1.5mm	Beige	20	<b>0279520000</b>	<b>0460560000</b>	SAK 2.5/35
AP SAK 2.5 BL	End Plate	1.5mm	Blue	20	<b>0279570000</b>	<b>0460580000</b>	
TW SAK 2.5	Partition	1.5mm	Beige	20	<b>0302820000</b>	<b>0302860000</b>	
TW SAK 2.5 BL	Partition	1.5mm	Blue	20	<b>0302870000</b>	<b>0302880000</b>	
AP SAK 4-10	End Plate	1.5mm	Beige	20	<b>0117920000</b>	<b>0117960000</b>	SAK 4/35; SAK 6/35; SAK 10/35
AP SAK 4-10 BL	End Plate	1.5mm	Blue	20	<b>0117970000</b>	<b>0117980000</b>	
TW SAK 4-10	Partition	1.5mm	Beige	20	<b>0130120000</b>	<b>0130160000</b>	
TW SAK 4-10 BL	Partition	1.5mm	Blue	20	<b>0130170000</b>	<b>0130180000</b>	
AP SAK 16	End Plate	1.5mm	Beige	20	<b>0271120000</b>	<b>0271160000</b>	SAK 16/35
AP SAK 16 BL	End Plate	1.5mm	Blue	20		<b>0271180000</b>	
TW SAK 16	Partition	1.5mm	Beige	10	<b>0281120000</b>	<b>0303660000</b>	
TW SAK 16 BL	Partition	1.5mm	Blue	10		<b>0303680000</b>	
AP SAK 35	End Plate	1.5mm	Beige	10	<b>0303620000</b>	<b>0303660000</b>	SAK 35/35; SAK 35N/35
AP SAK 35 BL	End Plate	1.5mm	Blue	10	<b>0303670000</b>	<b>0303680000</b>	
TW SAK 35	Partition	1.5mm	Beige	10	<b>0304320000</b>	<b>0304360000</b>	
AP SAK 70	End Plate	2mm	Beige	10		<b>0340960000</b>	SAK 70/35
AP SAK 95	End Plate	2mm	Beige	10	<b>0550920000</b>		SAK 95/35
AP SAK 95 BL	End Plate	2mm	Blue	10	<b>0550970000</b>		
AP DK 4	End Plate	1.5mm	Beige	20		<b>0359260000</b>	DK 4/35
AP DK 4 BL	End Plate	1.5mm	Blue	20		<b>0359280000</b>	
WTW EN	Partition	3mm	Beige	20		<b>1058800000</b>	
AP DK 4Q	End Plate	1.5mm	Beige	20		<b>1397160000</b>	DK 4 Q/35; DK 4 QV/35
AP DK 4Q BL	End Plate	1.5mm	Blue	20		<b>1397180000</b>	
WTW EN	Partition	3mm	Beige	20		<b>1058800000</b>	
AP SAK R	End Plate	1.5mm	Beige	20		<b>0211360000</b>	SAK R
AP SAK R BL	End Plate	1.5mm	Blue	20		<b>0211380000</b>	
AP SAK S 1+3 KRG	End Plate	3mm	Beige	20		<b>0191320000</b>	SAKS 1 (all); SAKS 3
AP ASK 1	End Plate	3mm	Beige	20		<b>0380360000</b>	ASK 1
AP KDSKI	End Plate	3mm	Beige	20		<b>9503340000</b>	KDKS 1
<b>Note</b>					* Qty. above is recommended pack sizes		

Fuse Inserts




Type	Order No	Qty*	Rated Voltage	Rated Current	Size (mm)	For Terminals
<b>G Fuse Inserts 5 x 20 without indicator acc. to IEC 60127-2 (VDE 0820 T.2 B1 1)</b> Breaking capacity 1500 A (at 250 V, 50Hz, cos = 0.7)						
(F) G 20/ 0.10 A/F	0430300000	10	250 V	0.10 A	5 x 20	SAKS 1/G20, SAKS 7,
(F) G 20/ 0.20 A/F	0430400000	10	250 V	0.20 A	5 x 20	ASK 1, WSI 6
(F) G 20/ 0.25 A/F	0430500000	10	250 V	0.25 A	5 x 20	KSK 1/35,
(F) G 20/ 0.50 A/F	0430600000	10	250 V	0.50 A	5 x 20	KDKS 1/35
(F) G 20/ 0.63 A/F	0439000000	10	250 V	0.63 A	5 x 20	
(F) G 20/ 1.00 A/F	0430700000	10	250 V	1.00 A	5 x 20	
(F) G 20/ 1.60 A/F	0430800000	10	250 V	1.60 A	5 x 20	
(F) G 20/ 2.00 A/F	0430900000	10	250 V	2.00 A	5 x 20	
(F) G 20/ 2.50 A/F	0431000000	10	250 V	2.50 A	5 x 20	
(F) G 20/ 3.15 A/F	0431100000	10	250 V	3.15 A	5 x 20	
(F) G 20/ 4.00 A/F	0431200000	10	250 V	4.00 A	5 x 20	
(F) G 20/ 5.00 A/F	0431300000	10	250 V	5.00 A	5 x 20	
(F) G 20/ 6.30 A/F	0431400000	10	250 V	6.30 A	5 x 20	
<b>G Fuse Inserts 5 x 25 with indicator acc. to DIN 41576</b> Breaking capacity 80 A (at 250 V, 50Hz, cos = 1)						
(M) G 25/ 0.25 A/M	0546900000	10	250 V	0.25 A	5 x 25	SAKS 1/G25, SAKS 7,
(M) G 25/ 0.50 A/M	0510300000	10	250 V	0.50 A	5 x 25	WSI 6
(M) G 25/ 0.80 A/M	0646400000	10	250 V	0.80 A	5 x 25	
(M) G 25/ 1.00 A/M	0265800000	10	250 V	1 A	5 x 25	
(M) G 25/ 10.0 A/M	0193100000	10	250 V	10 A	5 x 25	
(F) G 25/ 2.00 A/F	0192700000	10	250 V	2 A	5 x 25	
(F) G 25/ 4.00 A/F	0192800000	10	250 V	4 A	5 x 25	
(F) G 25/ 6.30 A/F	0192900000	10	250 V	6.30 A	5 x 25	
<b>Fuse Inserts 1 1/4 x 1/4 without indicator acc. to BS 88 33 KA</b> Breaking capacity 33 KA Fast						
GZ 0.5 A/F	0533800000	10	440 V	0.50 A	E 0.5 A	SAKS 3, SAKS 6
GZ 1.0 A/F	0525500000	10	440 V	1 A	E 1 A	
GZ 2.0 A	0294500000	10	440 V	2 A	E 2 A	
GZ 3.0 A	0295700000	10	440 V	3 A	E 3 A	
GZ 5.0 A	0294600000	10	440 V	5 A	E 5 A	
GZ 7.0 A	0295800000	10	440 V	7 A	E 7 A	
GZ 10.0 A	0293900000	10	440 V	10 A	E 10 A	
GZ 12.5 A FF	0245400000	10	440 V	12.5 A	E 12.5 A	
<b>D Fuse Inserts E 16 with indicator acc. to DIN 49360* (Diazed)</b>						
E 16/10 A RT	0208500000	25	500 V	10 A	E 10 A	SAKS 2
E 16/16 A GR	0208600000	25	500 V	16 A	E 16 A	
E 16/20 A BL	0208700000	25	500 V	20 A	E 20 A	
E 16/25 A GE	0208800000	25	500 V	25 A	E 25 A	
<b>D Fuse Inserts E 14 Size D 01 and E 18 size D 02 with indicator acc. to DIN 49522 (Neozed)</b>						
E 14/2 A RS	0137400000	10	400 V	2 A	E 14/2	SAKS 4
E 14/4 A BR	0137500000	10	400 V	4 A	E 14/4	
E 14/6 A GN	0328300000	10	400 V	4 A	E 14/6	
E 14/10 A RT	0328400000	10	400 V	10 A	E 14/10	
E 14/16 A GR	0328500000	10	400 V	16 A	E 14/16	
E 18/20 A BL	0361300000	10	400 V	20 A	E 18/20	SAKS 5
E 18/20 A GE	0361400000	10	400 V	25 A	E 18/25	
E 18/35 A SW	0361500000	10	400 V	35 A	E 18/35	
E 18/50 A WS	0361600000	10	400 V	50 A	E 18/50	
E 18/63 A KU	0361700000	10	400 V	63 A	E 18/63	

Note \* (F) = fast; (M) = medium-delayed action


## Cross Connection



Complete captive screw sleeve bar



Current Bar QL



VH Distance Sleeve




Screw BS

Terminal	Current In	Type Poles	Complete captive screw sleeve bar	Type Poles	Order No. QL	Current In	Distance Sleeve	Order No. Sleeve	Screw Type	Order No. Screw
SAK 2.5	24 A	Q 2	033700000	QL 2	015590000	32 A	VH 8	026670000	B (M3x15mm)	035900000
		Q 3	033710000	QL 3	015600000	32 A				
		Q 4	033720000	QL 4	015610000	32 A				
		Q 10	036870000	QL 10	033810000	32 A				
SAK 4	32 A	Q 2	033670000	QL 2	013060000	36 A	VH 13.5	024850000	B (M3x20mm)	030300000
		Q 3	033680000	QL 3	013070000	36 A				
		Q 4	033690000	QL 4	013080000	36 A				
		Q 10	036880000	QL 10	033820000	36 A				
SAK 6 N	41 A	Q 2	045670000	QL 2	019430000	41 A	VH 12	024900000	B (M3x20mm)	030300000
		Q 3	045680000	QL 3	019440000	41 A				
		Q 4	045690000	QL 4	019450000	41 A				
		Q 10	045700000	QL 10	033830000	41 A				
SAK 10	57 A	Q 2	045710000	QL 2	047030000	57 A	VH 12	024900000	B (M3x20mm)	030300000
		Q 3	045720000	QL 3	047040000	57 A				
		Q 4	045730000	QL 4	047050000	57 A				
		Q 10	045740000	QL 10	047060000	57 A				
SAK 16	76 A	Q 2	045750000	QL 2	047070000	76 A	VH 12	024900000	B (M3x20mm)	030300000
		Q 3	045760000	QL 3	047080000	76 A				
		Q 4	045770000	QL 4	047090000	76 A				
		Q 10	045780000	QL 10	047100000	76 A				
SAK 35 N	125 A			QL 2	056490000	99 A	VH 17	026700000	A (M4x30mm)	026710000
				QL 3	056500000	99 A				
				QL 4	056510000	99 A				
				QL 10	056520000	99 A				
SAK 35	125 A			QL 2	012360000	99 A	VH 17	026700000	A (M4x30mm)	026710000
				QL 3	012370000	99 A				
				QL 4	012380000	99 A				
				QL 10	033860000	99 A				
SAK 70	192 A			QL 2	034530000	180 A	VH 30.5	034550000	A (M5x45mm)	034560000
SAK 95	232 A			QL 2	055120000	180 A	VH 35	055110000	B (M5x50mm)	063020000
				QL 3	040760000	180 A				
				QL 4	040770000	180 A				
						180 A				
SAKS 1	6.3 A			QL 2	019140000	47 A			B (M3x6mm)	034620000
SAKS 3	10 A			QL 3	019150000	47 A				
SAKS 6	10 A			QL 4	019160000	47 A				
SAKS 7	10 A			QL 10	033880000	36 A				
SAKS 4	16 A			QL 2	032800000	47 A			A (M3x7mm)	019970000
				QL 3	032810000	47 A		A (M4x9mm)		
				QL 4	032820000	47 A				
				QL 10	033900000	36 A				
SAKS 2	10 A			QL 2	020780000	47 A		A (M4x9mm)	010330000	
SAKS 5	63 A			QL 3	020790000	47 A				
				QL 4	020800000	47 A				
				QL 10	033890000	36 A				
DK 4 Q	41 A	Q 2	033640000	QL 2	029720000	32 A	VH 5	029680000	B (M2.5x11mm)	040010000
DKB 4	41 A	Q 3	033650000	QL 3	029730000	32 A				

Note \* Qty. above is recommended pack sizes

## Dekafix



Product	Order No	Qty*	Printing Details
Horizontal Line of Print, 5mm	0473460001	10 CRD	1 - 50 Inclusive;
	0473460051	10 CRD	51-100 incl. through to 951 - 999
Vertical Line of Print, 5mm	0473560001	10 CRD	1 - 50 Inclusive;
	0473560051	10 CRD	51-100 incl. through to 951 - 999
<b>Note</b> * For full range of Markers see page F.2			

## Dekafix 5

Product	Order No	Qty*	Printing Details
Horizontal Line of Print, 5mm	DEK 5 FWZ 1-10	10 CRD	1-10
	DEK 5 FWZ 11-20	10 CRD	11-20
	DEK 5 FWZ 21-30	10 CRD	21-30
	DEK 5 FWZ 31-40	10 CRD	31-40
	DEK 5 FWZ 41-50	10 CRD	41-50
	DEK 5 FWZ 51-60	10 CRD	51-60
	DEK 5 FWZ 61-70	10 CRD	61-70
	DEK 5 FWZ 71-80	10 CRD	71-80
	DEK 5 FWZ 81-90	10 CRD	81-90
	DEK 5 FWZ 91-100	10 CRD	91-100
	Vertical Line of Print, 5mm	DEK 5 FSZ 1-10	10 CRD
DEK 5 FSZ 11-20		10 CRD	11-20
DEK 5 FSZ 21-30		10 CRD	21-30
DEK 5 FSZ 31-40		10 CRD	31-40
DEK 5 FSZ 41-50		10 CRD	41-50
DEK 5 FSZ 51-60		10 CRD	51-60
DEK 5 FSZ 61-70		10 CRD	61-70
DEK 5 FSZ 71-80		10 CRD	71-80
DEK 5 FSZ 81-90		10 CRD	81-90
DEK 5 FSZ 91-100		10 CRD	91-100
<b>Note</b> * For full range of Markers see page 134			

## Terminal Markers for TS 35



Type	Order No	Qty*
<b>Scht 5 - 44.5 (L) x 19.5 (W) mm</b> + Label (Neutral) + Protection (Transparent)	0292460000	20
	1607710000	160 (Label / Sheet)
	0294000000	20
<b>Scht 5 S - 44.5 (L) x 9.5 (W) mm</b> + Label (Neutral) + Cover (Transparent)	1631930000	20
	1631920000	140 (Label / Sheet)
	1631940000	20
<b>EM 8/30</b> + Label (Neutral) White Yellow + Label (Neutral) White Yellow	1806120000	50
	1607720000	240 Tags
	1634780000	240 Tags
	1670390000	10 (Sheet)
	1670400000	10 (Sheet)
	<b>Note</b> * Qty. above is recommended pack sizes	

**DIN Rail**



Type	Material	Thickness	Length	Qty*	Order No
<b>TS 15 x 5</b> Slotted	Steel, White Passivated	1 mm	2 m	1	<b>0117500000</b>
<b>TS 32 x 15</b>	Steel, White Passivated	1.5 mm	2 m	1	<b>0122800000</b>
<b>TS 32 x 15</b> with Slotted Hole	Steel, White Passivated	1.5 mm	2 m	1	<b>0676100000</b>
<b>TS 35 x 7.5</b>	Steel, White Passivated	1 mm	2 m	1	<b>0383400000</b>
<b>TS 35 x 15 x 1.5</b>	Steel, White Passivated	1.5 mm	2 m	1	<b>0236400000</b>
<b>TS 35 x 7.5</b> with Slotted Hole M6x19mm	Steel, White Passivated	1 mm	2 m	1	<b>0676200000</b>
<b>TS 35 x 15</b> with Slotted Hole M5x25mm	Steel, White Passivated	1 mm	2 m	1	<b>0236500000</b>

**Note** \* Qty. above is recommended pack sizes

**End Brackets**

• Spring Clamp



Type	Order No	Qty*
ZEW 35/6 (TS35)	<b>9540000000</b>	20
ZEW 35/2 (TS35)	<b>8630740000</b>	20
ZEW 15 (TS15)	<b>7920340000</b>	20

**Note** \* Qty. above is recommended pack sizes

• Screw Clamp



Type	Order No	Qty*
WEW 35/1 (TS35)	<b>1059000000</b>	50
WEW 35/2 (TS35)	<b>1061200000</b>	50
EW 15 (TS15)	<b>0382860000</b>	50
EW 35	<b>0383560000</b>	50

**Note** \* Qty. above is recommended pack sizes

**QB Cross Connection Comb - Insulated**

- QB cross connection combs for interconnection between terminals where standard Q and QL systems cannot be used.

**Note: Their use will restrict the cable size used.**




Type	Qty*	Order No	For use with Terminals
QB 2-2 WAY INSULATED QB 3-3 WAY INSULATED QB 4-4 WAY INSULATED QB 10 - 10 WAY INSULATED	1 1 1 1	<b>0205700000</b> <b>0205800000</b> <b>0205900000</b> <b>0343800000</b>	For use with SAKT 1 and SAKT 2
QB 2-2 WAY INSULATED QB 3-3 WAY INSULATED QB 4-4 WAY INSULATED	1 1 1	<b>0482700000</b> <b>0482800000</b> <b>0482900000</b>	For use with Terminals 6 or 6.5mm Thick
QB 2-2 WAY INSULATED QB 3-3 WAY INSULATED QB 4-4 WAY INSULATED	1 1 1	<b>0461100000</b> <b>0461200000</b> <b>0461300000</b>	For use with Terminals 8mm Thick
<b>Note</b> * Qty. above is recommended pack sizes			

**QB Cross Connection Comb - Insulated**

- QB cross connection combs for interconnection between terminals where standard Q and QL systems cannot be used.  
The comb can be cut to suit application.

**Note: Their use will restrict the cable size used.**


- Insulation strips are available to provide protection against accidental contact with live parts.



Type	Qty*	Order No	For use with Terminals
QB 75 STRAIGHT QB 75 ANGLED	1 1	<b>0535200000</b> <b>0526400000</b>	Uninsulated Comb, 75-way; 6mm Pitch Uninsulated Comb, 75-way; 6mm Pitch
QB 58 STRAIGHT QB 58 ANGLED	1 1	<b>0545400000</b> <b>0545300000</b>	Uninsulated Comb, 58-way; 8mm Pitch Uninsulated Comb, 58-way; 8mm Pitch
QB 25 PIN LENGTH 11mm QB 25 PIN LENGTH 15mm	1 1	<b>0134000000</b> <b>3827300000</b>	Uninsulated Comb, 25-way; 6.5mm Pitch Uninsulated Comb, 25-way; 6.5mm Pitch
QB 58 INSULATION STRIP QB 75 INSULATION STRIP	1 1	<b>0546000000</b> <b>0526700000</b>	Insulation Strip, 58-way; 8mm Pitch Insulation Strip, 75-way; 6mm Pitch
<b>Note</b> * Qty. above is recommended pack sizes			

**ADP Transparent Cover and HP Support Bracket**

- ADP transparent covers ensure external accessories such as cross connections are touch proof and protect the assembly from oil splashes or water drips. The cover clips firmly into place over the end brackets HP. They are manufactured from hard PVC.
- HP support brackets are for use with ADP covers and made from a polyamide material. They are combi foot mounting for TS32 or TS35 din rail.

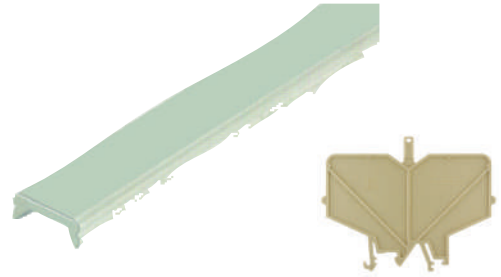

Type	Qty*	Order No	For Support Bracket	For Terminals
<b>ADP 1 COVER</b> 48(W) x 22(H) mm	1 M	<b>0485200000</b>	HP1	SAKD 2.5N, SAK 2.5/35, SAK 2.5, EKN 2.5
<b>Accessories:</b> HP1 Support Bracelet 41(W) x 54 (H) x 2(D) mm	1	<b>0485560000</b>		
<b>ADP 2 COVER</b> 61.5(W) x 30(H) mm	1 M	<b>0485300000</b>	HP2	WDU 2.5-10, WDK, SAK 4, SAK 4/35, SAK 6N, EK 4, EK 10/35, SAKR, SAKR-D, SAKC 4, RSF 1, RSF 3
<b>Accessories:</b> HP2 Support Bracelet 41(W) x 54 (H) x 2(D) mm	1	<b>0485660000</b>		
<b>ADP 3 COVER (with HP3)</b> 89(W) x 34.5(H) mm	1 M	<b>0485400000</b>	HP3	WDU 16-35, WPE 16-35, SAK 16, SAK 16/35, EK 16, EK 35, SAK 35N, SAK 35N/35, SAK 70, SAK H, SAK C 10, RSF 2, SAKS 2, SAKS 2/35, SAKS 4, SAKS 4/35, SAKS 5, SAKS 5/35
<b>Accessories:</b> HP3 Support Bracelet 41(W) x 54 (H) x 2(D) mm	1	<b>0485760000</b>		
<b>ADP 3 COVER (with HP4)</b> 89(W) x 34.5(H) mm	1 M	<b>0485400000</b>	HP4	ASK 1, AFT, KB 10/6, KB 10/10, SAKT 1, SAK T 1/35, SAK T 2/35, SAK A, SAK B, SAK S 1, SAK S 1/35, SAK S 3
<b>Accessories:</b> HP4 Support Bracelet 41(W) x 54 (H) x 2(D) mm	1	<b>0485860000</b>		
<b>Note</b>	* Qty. above is recommended pack sizes			

**Example:**
